


RoHS

Rev.	Description	Date
A		05-2024

**Cross Section**

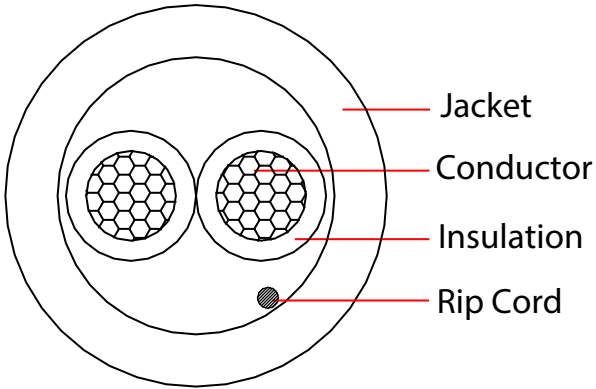

**Approval**



**Description**

- 16/2 Stranded CMR/CL3R Sound Audio Cable
- Direct burial

**Applicable Standards**

- For Communication and Signal Control Systems
- 2 Oxygen Free Bare Copper Conductors in an Overall Jacket

**Product Specifications**

**Construction & Material:**

	Item	Specifications
Conductor	Conductor	Oxygen Free B.C
	Number of Conductor	2
	AWG	16
	Stranding	65
Insulation	Diameter	0.0063 (inches)
	Material	PVC
	Nominal Wall	0.0098 (inches)
Jacket	Diameter	0.0827 (inches)
	Material	FR-PVC
	Nominal Thickness	0.0197 (inches)
Paper Type		Yes
Rip Cord		Yes
Conductor Resistance		15.8 (ohms/1000m)
Voltage		300 (volts)
Nominal Weight		16 (pounds)
Temperature Rating		-20°C - 70°C

Item Number:	10G2-712SF	
Title:	Speaker Cable, White, Pure Copper, CM / direct burial rated, 16/2 (16 AWG 2 Conductor), 65 Strand / 0.16mm, Pullbox, 500 foot	
Drawn by:	JL	
Approved by:	MAC	
ID:	125	

No.	Specifications
-----	----------------