


REV.	DESCRIPTION	DATE
A		12-2013

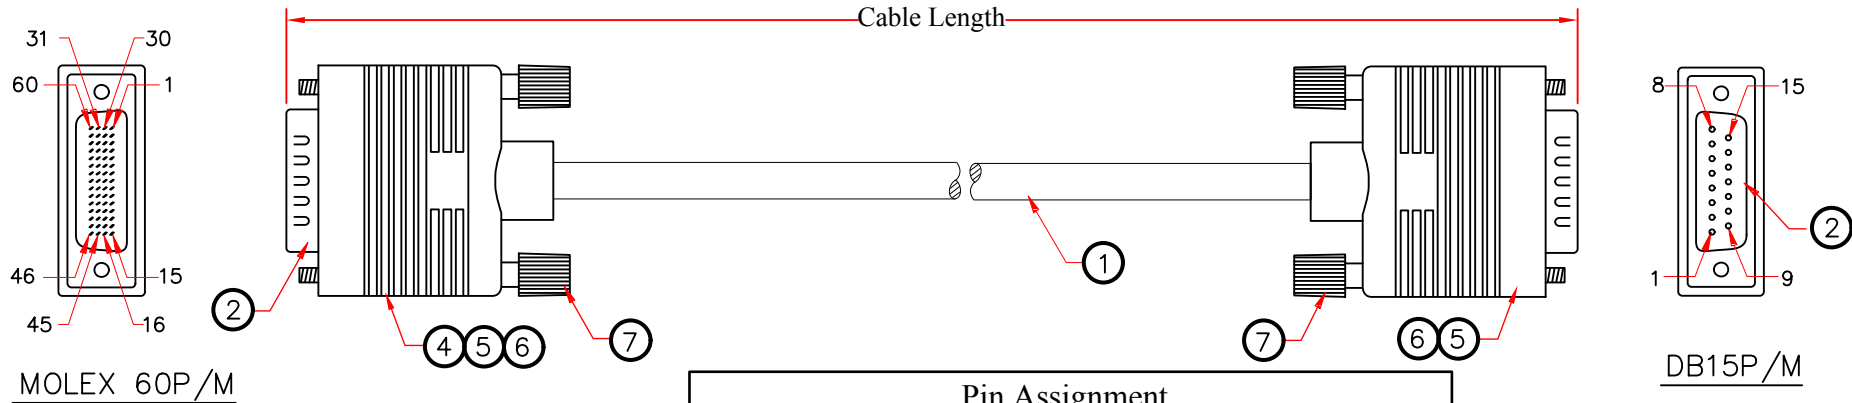

RoHS

Pin Assignment			
MOLEX60 Male	DB15 Male	MOLEX60 Male	DB15 Male
1	5	15	8
2	12	56	7
9	3	47	
10	10	48	
11	2	51	
12	9	52	
25	13	46	1
26	6	Shield	Shield
27	11	Drain	
28	4		

PART NO	CABLE LENGTH
10CO-01106	6 ft
10CO-01110	10 ft

7	Molded Thumbscrew #4-40,L:48mm, Black
6	Molded PVC Black
5	Copper Foil, W33*75mm
4	UL1061 26AWG Insulator Wire, L:28mm
3	DB15P Male, Gold Flash on Contacts, Blue Insulator, Shell Nickel Plated
2	MOLEX 60P Male, Gold Flash on Contacts, Black Insulator, Shell Nickel Plated
1	UL2919,6 Twisted Pairs 28AWG,Alum-Mylar Foll and Braid Shielding,With Drain Wire, OD:7.5mm, Jacket Colo Black
NO.	SPECIFICATIONS
BOM LIST	

ITEM NUMBER	10CO-011xx		DRAWER	JL
TITLE	Cisco Compatible Serial Cable HD60 Male to DB15 Male		CHECKED	
MATERIAL	SCALE		APPROVED	
REV.	A	UNIT	INCH	
DRAWING NO:				