


Rev.	Description	Date
A		08-2019

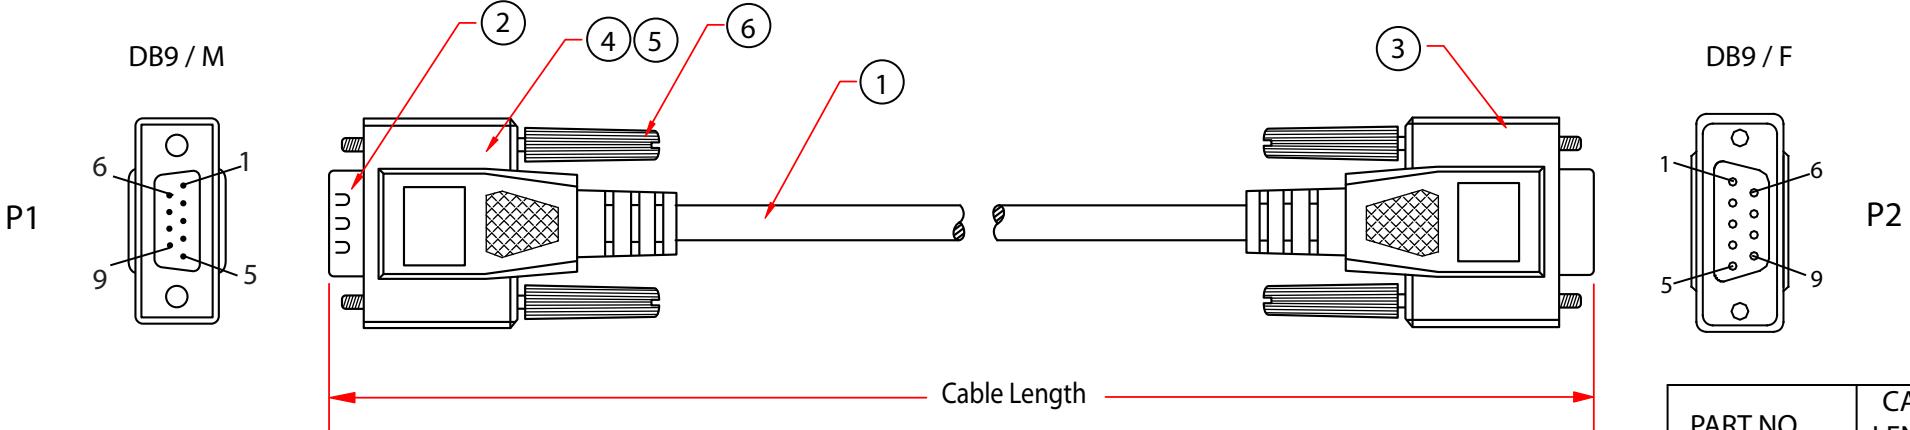


Pin Assignment		
DB9 Male		DB9 Female
1	—————	1
2	—————	2
3	—————	3
4	—————	4
5	—————	5
6	—————	6
7	—————	7
8	—————	8
9	—————	9
G	—————	G

RoHS

NOTES:
 1. Product Must be 100% Tested 4 Times,
 No Short, No Open Circuit and No Dislocation
 2. Electronics Testing
 Insulation Resistance: 5Mohm
 Conductor Resistance: 5ohm
 Voltage Rating: 300V

PART NO.	CABLE LENGTH
10D1-03201	1 ft
10D1-03203	3 ft
10D1-03206	6 ft
10D1-03210	10 ft
10D1-03215	15 ft
10D1-03225	25 ft
10D1-03250	50 ft
10D1-032HD	100 ft

6	Molded Thumbscrew,#4-40, Beige	Item Number:	10D1-032xx		
5	Outer Molded PVC Beige		Title:	Serial Extension Cable, DB9 Male to DB9 Female, RS-232, UL rated, 9 Conductor, 1:1, 1 foot	
4	Inner Molded LDPE Transparent	Drawn by:		JL	
3	DB9 Female, w/ Gold Plating on Contacts, Blue Insulator			Approved by:	MAC
2	DB9 Male, w/ Gold Plating on Contacts, Blue Insulator	ID:	115		
1	UL2464 Cable, 9C 28AWG(7/0.12BC)+ Drain 26AWG(7/0.16BC), Single Shielded with AL-Foil, Beige Outer PVC Jacket				
No.	Specifications				