



Rev.	Description	Date
A		09-2019

RoHS

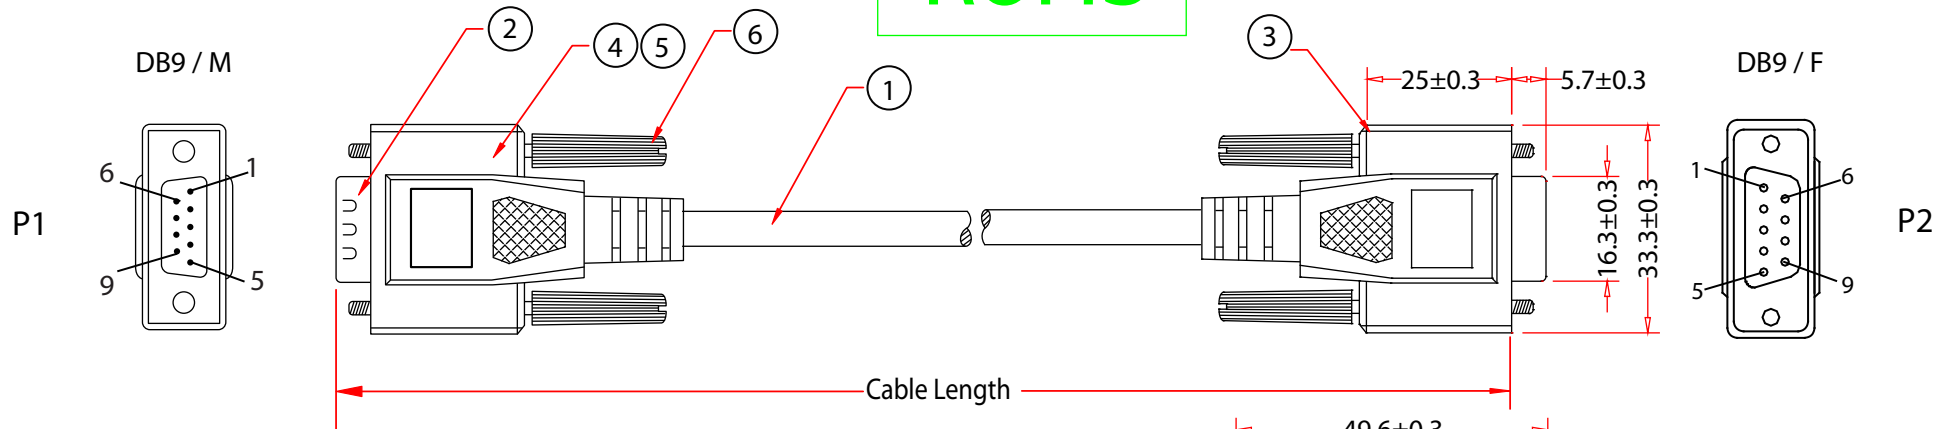

Pin Assignment		
DB9 Male		DB9 Female
1	Brown	1
2	Red	2
3	Orange	3
4	Yellow	4
5	Green	5
6	Blue	6
7	Purple	7
8	Gray	8
9	Black	9
G	Drain	G

- NOTES:**
- Product Must be 100% Tested 4 Times, No Short, No Open Circuit and No Dislocation
  - Electronics Testing  
Insulation Resistance: 5Mohm  
Conductor Resistance: 5ohm  
Voltage Rating: 300V
  - Temperature Range: -10 ~ +70 Degree

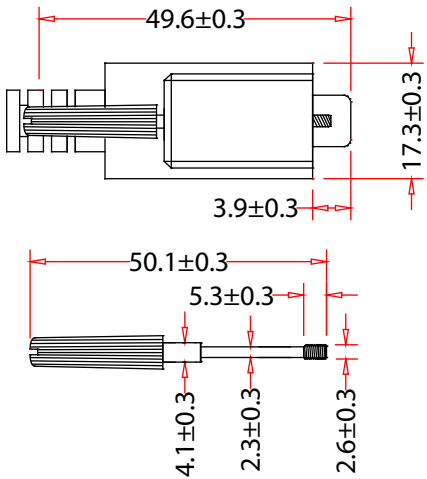

PART NO.	CABLE LENGTH
10D1-03203BK	3 ft
10D1-03206BK	6 ft
10D1-03210BK	10 ft
10D1-03215BK	15 ft
10D1-03225BK	25 ft
10D1-03250BK	50 ft

6	Molded Thumbscrew,#4-40, Black	Item Number:	10D1-032xxBK	
5	Outer Molded PVC Black		Title:	Serial Extension Cable, DB9 Male to DB9 Female, RS-232, UL rated, 9 Conductor, 1:1,Black
4	Inner Molded LDPE Transparent	Drawn by:		JL
3	DB9 Female, w/ Gold Plating on Contacts, Blue Insulator		Approved by:	MAC
2	DB9 Male, w/ Gold Plating on Contacts, Blue Insulator	ID:		115
1	UL2464 Cable, 9C 28AWG(7/0.12BC)+ Drain 26AWG(7/0.16BC), Single Shielded with AL-Foil, Black Outer PVC Jacket			
No.	Specifications			