



Rev.	Description	Date
A		02-2024

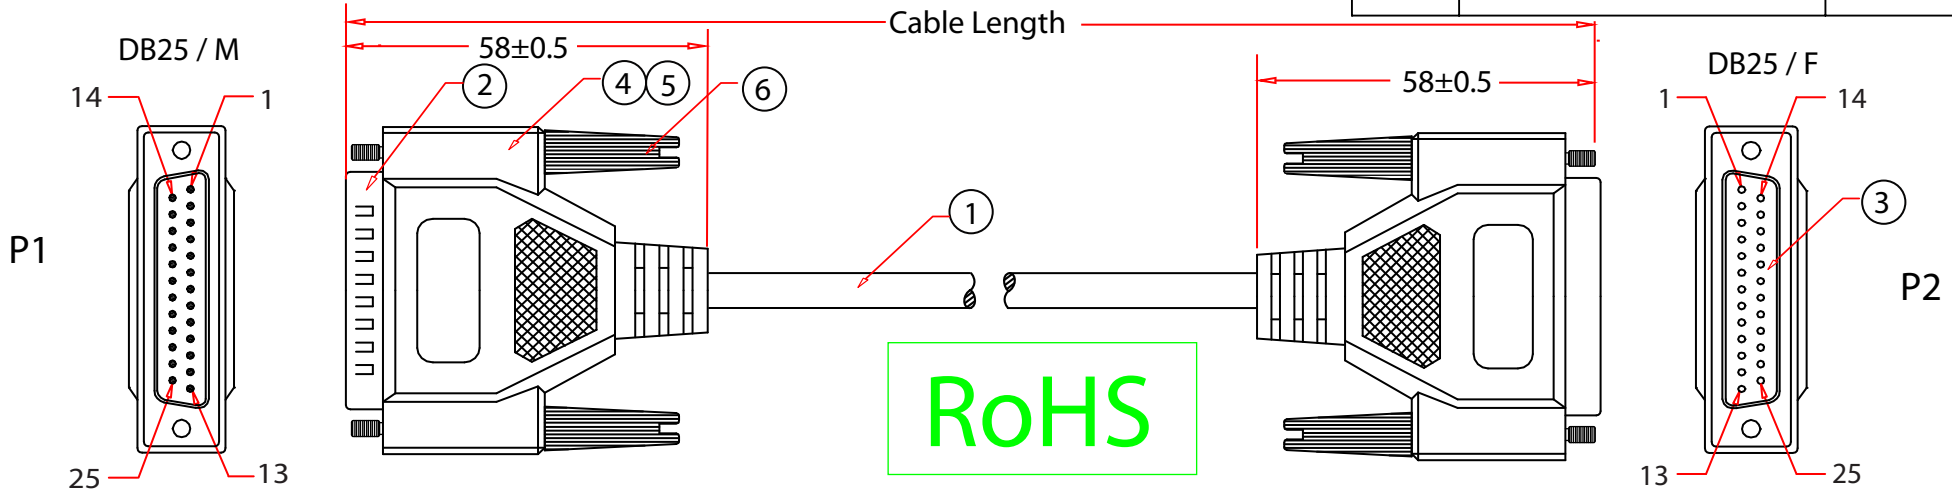

Pin Assignment


P1	P2	P1	P2
Brown 1	1	Brown/Black 14	14
Red 2	2	Red/Black 15	15
Orange 3	3	Orange/Black 16	16
Pink 4	4	Pink/Black 17	17
Yellow 5	5	Yellow/Black 18	18
Green 6	6	Green/Black 19	19
Light Green 7	7	Light Green/Black 20	20
Blue 8	8	Blue/Black 21	21
Light Blue 9	9	Light Blue/Black 22	22
Purple 10	10	Purple/Black 23	23
Gray 11	11	Gray/Black 24	24
White 12	12	White/Black 25	25
Black 13	13	Shell	Shell

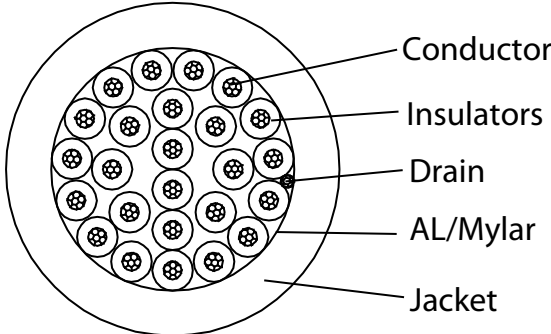

Cable Sectional

PART NO.	CABLE LENGTH
10D3-01203	3 ft
10D3-01206	6 ft
10D3-01210	10 ft
10D3-01215	15 ft
10D3-01225	25 ft
10D3-01250	50 ft
10D3-012HD	100 ft

6	Molded Thumbscrew, #4-40, Beige
5	Outer Molding Beige PVC Hood, Fully Shielded w/AL-Foil
4	Inner Molding PE, Color Transparent
3	DB25 Female, Gold Flash on Contacts, Blue Insulator
2	DB25 Male, Gold Flash on Contacts, Blue Insulator
1	UL2464 25C*28AWG(7/0.12TC)+D26AWG(7/0.16TC)+AL OD:7.0,Beige Outer PVC
No.	Jacket Specifications

Item Number:	10D3-012xx	
Title:	Serial Extension Cable, DB25 Male to DB25 Female, RS-232, 1:1	
Drawn by:	JL	
Approved by:	MAC	
ID:	115	