


Rev.	Description	Date
A		05-2019

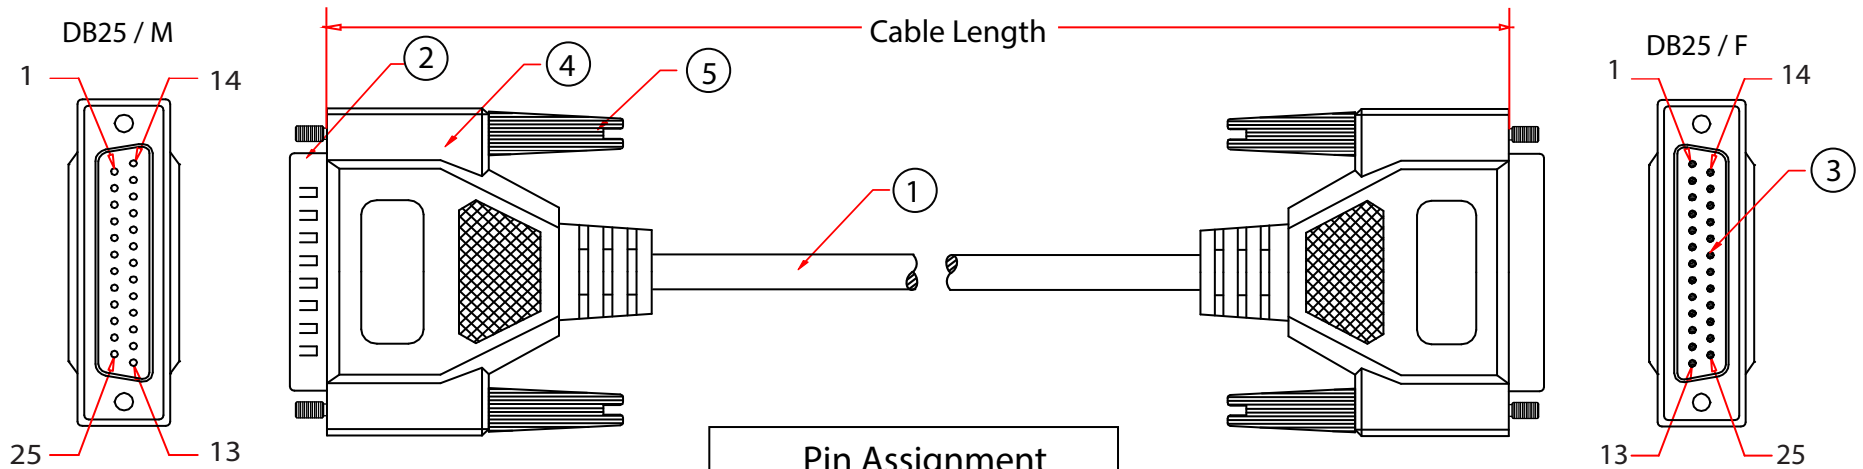

RoHS

Pin Assignment	
DB25 M	DB25 F
1 _____	1 _____
2 _____	2 _____
3 _____	3 _____
4 _____	4 _____
22 _____	22 _____
23 _____	23 _____
24 _____	24 _____
25 _____	25 _____
Shell _____	Drain _____ Shell

PART NO.	CABLE LENGTH
10D3-01203	3 ft
10D3-01206	6 ft
10D3-01210	10 ft
10D3-01215	15 ft
10D3-01225	25 ft

5	Molded Thumbscrew, #4-40, Beige	Item Number:	10D3-012xx
4	Beige Molded PVC Hood, Fully Shielded w/AL-Foil	Title:	Serial Extension Cable, DB25 Male to DB25 Female, RS-232, 1:1
3	DB25 Female, w/Gold Plating Contacts		
2	DB25 Male, w/Gold Plating Contacts	Drawn by:	JL
1	25C 28AWG+ Drain Wire, Single Shielded with AL-Foil , Beige Outer PVC Jacket	Approved by:	MAC
No.	Specifications	ID:	1

