



Rev.	Description	Date
A		04-2019

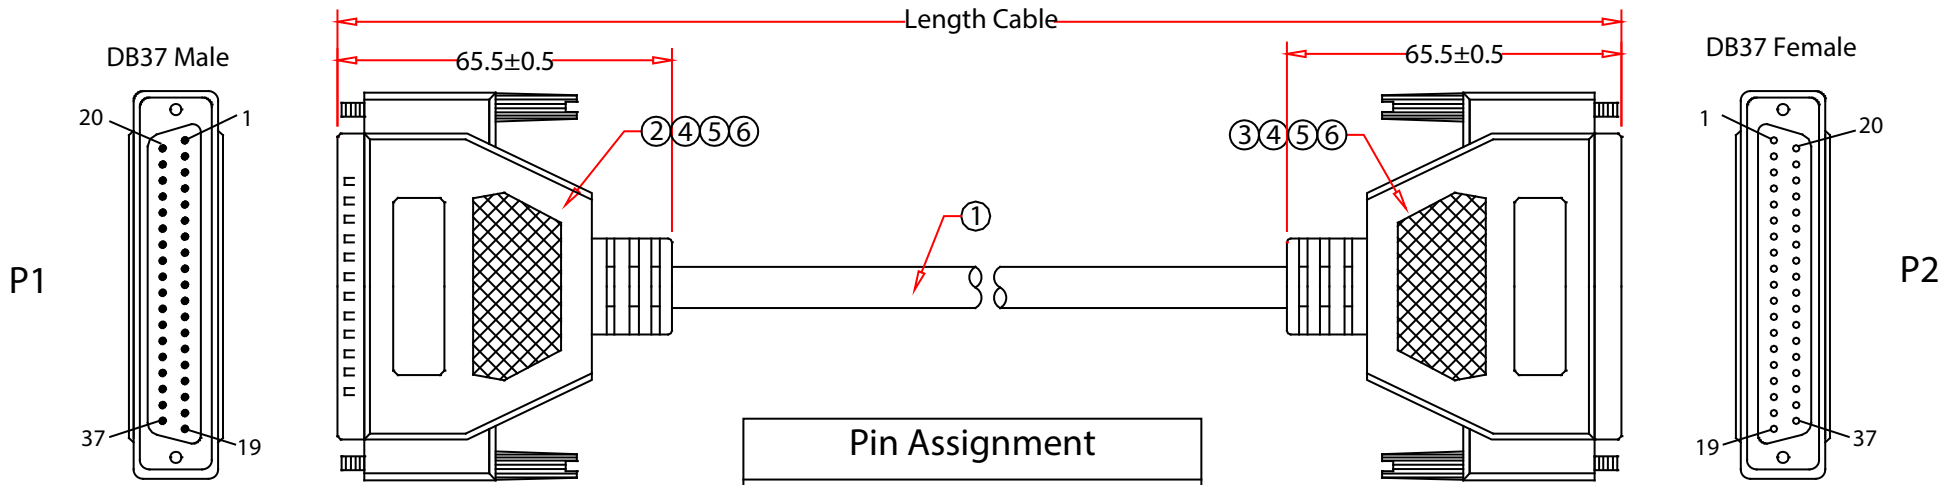

RoHS

Pin Assignment		
P1		P2
1	—————	1
2	—————	2
3	—————	3
4	—————	4
34	—————	34
35	—————	35
36	—————	36
37	—————	37
Shell	————— Drain ———	Shell

PART NO.	CABLE LENGTH
10D4-01203	3 FT
10D4-01206	6 FT
10D4-01210	10 FT

6	#4-40 Molded Thumbscrew, Length 46.5mm, Color Beige	Item Number:	10d4-012xx
5	Beige Molded PVC Hood, Fully Shielded w/AL-Foil	Title:	Serial Extension Cable, DB37 Male to DB37 Female, 37 Conductor, 1:1
4	Inner Molded PE	Drawn by:	JL
3	DB37 Female, Gold Flash on Contacts, Insulation Blue, Shell Nickel Plated	Approved by:	MAC
2	DB37 Male, Gold Flash on Contacts, Insulation Blue, Shell Nickel Plated	ID:	1
1	NON-UL 28AWG 37C, Alum-Mylar Foil Shielded with Drain Wire, OD:8.5mm,Beige Outer PVC Jacket		
No.	Specifications		