



Rev.	Description	Date
A		05-2019

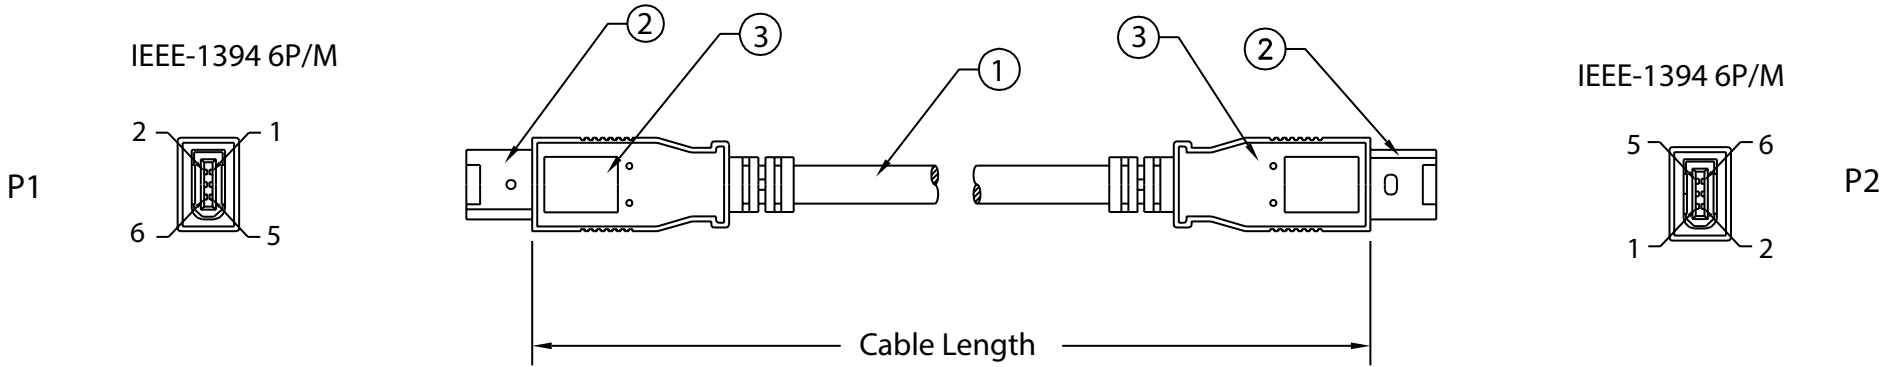

RoHS

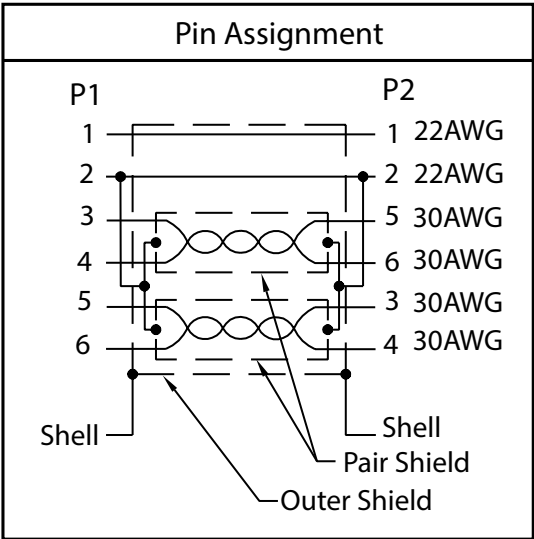

- Notes:
1. Ferrule: 2.54µm Min Tin-Lead
 2. Shells: 5.08µm Min Tin-Lead Over 2.54µm Min Copper
 3. Contacts: 0.76µ Min Gold
(0.076µm Gold Over 0.76µm Min Palladium)

PART NO.	CABLE LENGTH
10E3-01106	6 ft
10E3-01115	15 ft

3	Black Molded PVC Hood
2	IEEE-1394 6 Pin Male, w/Gold Plating Contacts
1	UL 20276 Cable, (2) 22AWG Power Lead + (2) 30AWG Shielded Twisted Pair Signale, Overall Shielded, Black Outer PVC Jacket
No.	Specifications

Item Number:	10E3-011xx	
Title:	Firewire 400 6 Pin cable, IEEE-1394a	
Drawn by:	JL	
Approved by:	MAC	
ID:	1	