

Rev.	Description	Date
A		04-2019


Application

Riser

Flame Rating

UL 1666


RoHS

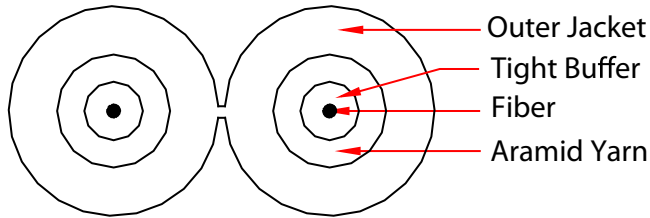


Product Specifications

Construction & Material :

Item	Specifications
Product	Multimode, Duplex, 50/125
Fiber Count	2
Outer Jacket Material	Flame Retardant PVC
Outer Jacket Color	Aqua
Strength Member	Aramid Yarn
Tight Buffer Material	Flame Retardant PVC
Tight Buffer Color	Available in 12 TIA/ EIA color standard

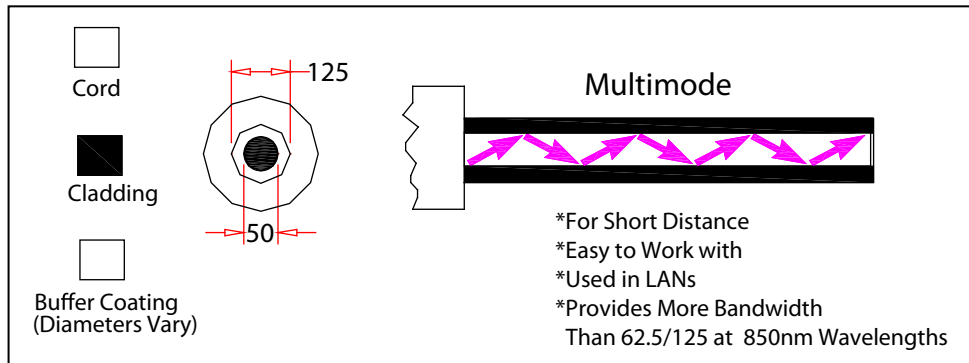

Physical Characteristics	Value
Nominal Outer Diameter (mm)	2.95 x 5.95
Weight (lbs/ km)	34
Minimum Bend Radius (mm) (Bend Insensitive MM)	7.5

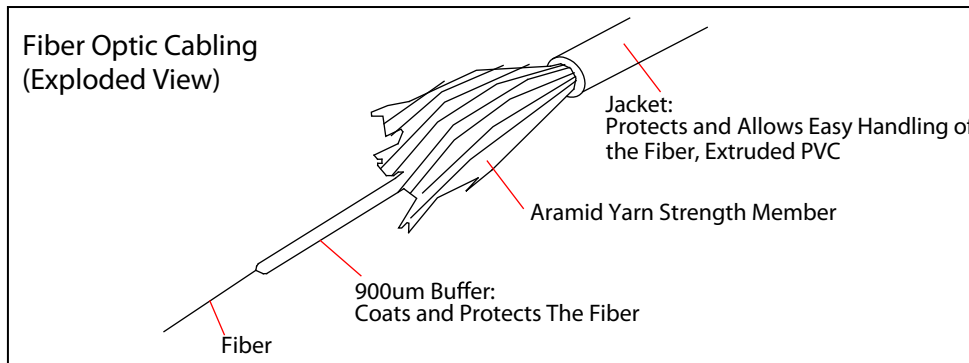

Optical Characteristics

Items	OM3
Core Size	50 um
Wavelength	(850/ 1300) nm
Max. Attenuation	(3.5/ 1.5) dB/ Km
Bandwidth (EMB) (High Performance)	2000 MHz @850nm
Link Length (10Gb/s)	300 mtr

Storage Temp	-40 °C / +70 °C
Operating Temp	-20 °C / +70 °C

Item Number:	10F1-301NH	
Title:	Bulk Zipcord Fiber Optic Cable, Multimode, Duplex, 50/125, OM3, Aqua, Riser Rated, Spool, 1000 foot	
Drawn by:	JL	
Approved by:	MAC	
ID:	124	