


Rev.	Description	Date
A		01-2023

Features and Benefits

- 900µm Tight Buffers
- Aramid yarn strength members
- Exclusive use of Corning® optical fibers
- Jacket print ensures product identification and fiber compatibility
- Durable jacket offers added protection during installation and in rugged use applications

Description

- Constructed with Corning glass.
- CableWholesale, Inc. Distribution Cable is composed of 2 to 24 colored tight buffered optical fibers, aramid yarn, and a PVC outer jacket. All component materials meet the EU RoHS and REACH Directive standards.
- CWS Distribution Cable is available in 12 TIA standard colors or special order colors. UL Listed OFNR cables are available, and unrated cables may be supplied to accommodate special needs. Standard surface print denotes construction, NEC rating, and fiber type, and includes footage markers.
- Custom print may also be accommodated.

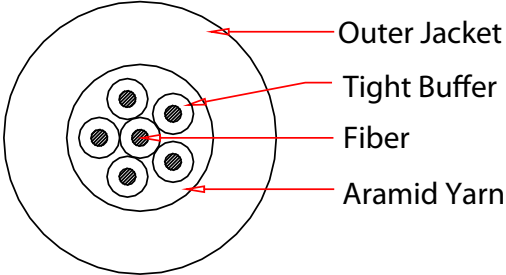

Cross Section

Application

Riser

Flame Rating

UL 1666
UL 1685 (FT4)

Cable Characteristics

Product	Multimode, 50/125 OM3
Fiber Count	6
Outer Jacket Material	Flame Retardant PVC
Outer Jacket Color	Aqua
Strength Member	Aramid Yarn
Tight Buffer Material	Flame Retardant PVC
Tight Buffer Color	Available in 12 TIA/ EIA color standard

Physical Characteristics	Value(6 Fiber Count)
Nominal Outer Diameter (mm)	4.8
Weight (lbs/ km)	102
Minimum Bend Radius, Installation (cm)	7.2
Minimum Bend Radius, Operation (cm)	4.8



Optical Characteristics

Fiber Type	Clear Curve OM3
Core Size [µm]	50
Wavelength [nm]	850 / 1300
Max. Attenuation[dB/km]	3.0 / 1.0
Link Length[m]	300 (10Gb/s@850nm)
Bandwidth (EMB High Performance)[MHz.km]	2000 @850nm

Specifications

Temperature Range	Indoor
Storage Temperature	-40 °C / +70 °C
Operating Temperature	-20 °C / +70 °C

Item Number:	10F2-3062H	
Title:	6 Fiber Indoor Distribution Fiber Optic Cable, Multimode, 50/125, OM3, 10 Gbit, Aqua, Riser Rated, Spool, 2000 foot	
Drawn by:	JL	
Approved by:	MAC	
ID:	120	

No.	Specifications
-----	----------------