

Rev.	Description	Date
A		10-2021

**Overview**

Cablewholesale indoor/outdoor Tight-Buffered Distribution Cable contains several tight-buffered bundled under the same jacket with kevlar strength members to stiffen the cable and prevent kinking.

With aramid yam as a reinforcing member, the cable is light weight, softness and easy to peel. It is widely used as pigtails and jumpers for communication equipment.


**Application**

- Widely used in FTTH access network
- Telecommunication Networks
- CCTV Networks
- Data Communications Networks
- Local Area Networks



**Features**

- Widely used between wiring closet and equipment rooms
- Tested to meet or exceed TIA&GR-409-CORE standards
- Non-unitized tight-buffered distribution indoor cable
- Light weight and buffered to 900µm for easy stripping and handling
- Characteristic of fiber color: blue/orange/green/brown /grey/white/red/black/yellow/purple/pink/aqua
- Choice of jacket

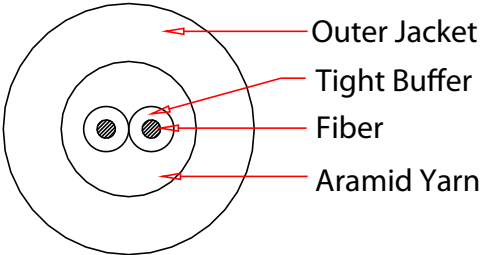

Cross Section

**Cable Parameters**

Product	Multimode 62.5/125 OM1
Fiber Count	2 cores
Fiber Type	CORNING Glass
Strength Member	Aramid Yarn
Cable Type	Tight Buffer
Outer Jacket Color	Black
Outer Jacket	Riser Rated

**Technical Parameter( 2 Fiber Count)**

Outer Diameter (mm)	4.4±0.2	
Nomial Weight(kg/km)	19	
Max.Tensile Strength(N)	Short-term	270
	Long-term	90
Min. Bending Radius (mm)	Short-term	20D
	Long-term	10D
Max.Crush Resistance	1000	

**Optical Characteristics**

Fiber Type	OM1 62.5/125µm
Wavelength	850nm/1300nm
Attenuation(dB/km)	850nm ≤3.5 1300nm ≤1.0
Overfilled Modal Bandwidth (MHz.km)	1300nm ≥160 850nm ≥200
Cladding diameter(µm)	125±1.0
Cladding material	siO2
Cladding non-circularity(%)	≤1.0
Coating/cladding concentricity error(µm)	≤12.5
Coating diameter(µm)	245±10
Core diameter(µm)	62.5±2.5
Core non-circularity(%)	≤6.0
Core/cladding concentricity error(µm)	≤0.6
Serial 1 Gigabit Ethernet	300m/500m
Serial 10 Gigabit Ethernet	33m

**Environmental characteristics**

Temperature dependence Induced attenuation	-40~75°C	≤0.05 dB/km
Temperature-humidity cycling Induced attenuation	-10~+75°C, 90%R.H	≤0.05 dB/km
Damp heat dependence Induced attenuation	85°C,85%, R.H.,30days	≤0.05 dB/km
Watersoak dependence Induced attenuation	20°C for 30 days	≤0.05 dB/km
Temperature Range	Operating Temperature	-20~75°C
	Storage Temperature	-40~80°C

Item Number:	10F3-202NH	
Title:	2 Fiber Indoor/Outdoor Fiber Optic Cable, Multimode, 62.5/125, Black, Riser Rated, Spool, 1000 foot	
Drawn by:	JL	
Approved by:	MAC	
ID:	399	

No.	Specifications
-----	----------------