

Product Specification


Construction & Material

| REV. | DESCRIPTION | DATE |
|------|-------------|---------|
| A | | |
| B | | 03-2008 |

| | |
|-------------|-------|
| Part Number | Color |
| 10F5-0271TH | Red |

| Item | Specification | |
|--------------------------|-----------------------------|---------------|
| Product | FPLR, Fire Alarm / Security | |
| Conductor | Construction | Solid 2X18AWG |
| | Material | Bare Copper |
| Insulation | Material | PVC |
| | Min. thickness | |
| | Avg. thickness | 0.254 mm |
| | Diameter | 1.524 mm |
| | Norm. Lay Length | 114 mm |
| Jacket | Color | Black and Red |
| | Material | PVC |
| | Min. thickness | |
| | Avg. thickness | 0.508 mm |
| | Diameter | 4.318 mm |
| Color | Red | |
| Approximate Cable Weight | 20 lbs./Kft | |

Cross Section: _____

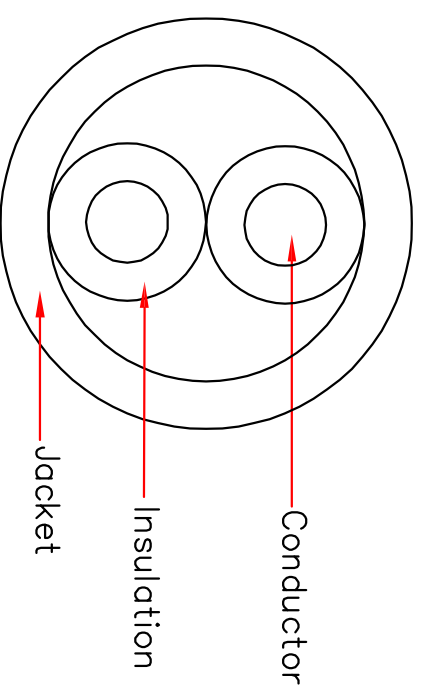

| Electrical Properties: | | DRAWER | LIBRA |
|---------------------------------------|----------------------------------|----------|-------|
| Nom. DC Resistance per Conductor@20°C | 6.43 Ohms/Kft.nom. | CHECKED | |
| Capacitance Between Conductors@1KHz | 35 pF/ft.nom. | APPROVED | |
| Operating Voltage | 300 V/RMS max. | | |
| Temperature Rating | -20 °C to 60 °C | | |
| PART NUMBER: | TITLE: | | |
| 10F5-0271TH | 2/18 Solid FPLR Pullbox, 1000 ft | | |

