


Rev.	Description	Date
A		01-2021

RoHS

Cross Section

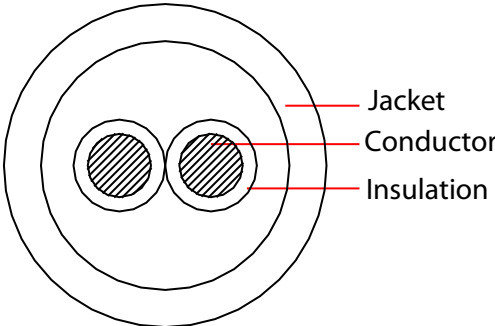


Construction & Material :

Item		Specifications
Product		FPLR Fire Alarm / Security
Conductor	Construction	Solid 2 x16AWG
	Material	Bare Copper
Insulation	Material	PVC
	Avg.thickness	0.25mm
	Diameter	1.80± 0.05 mm
	Color	Black and Red
Jacket	Material	PVC
	Avg.thickness	0.38 mm
	Diameter	OD Average 2.769 / Final Diameter 4.369mm
	Color	Red
Marking	STRUCTURED CABLE PRODUCTS --- P/N 16/2FPLR --- RISER FIRE ALARM CABLE (UL) CL2R/CL3R Exxxxxx OR FPLR (UL) C(UL) CMG CMR UNSH 2/C 16 AWG SOLID PVC JKT --- ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 RoHS	
Package Weigth	28 lbs/ 6 kgs	

Characteristics	
Mutual Capacitance	24.6 pF/ft
DC Resistance 25°C	4.3 Ohms / 1000 ft
Impedance	75 Ohms
Velocity of Prop	66 %
Inductance	1.4 mH/km
Temp/Voltage	60°C / 300V
Operating Temperature	-20°C to 60°C

PART NO.	Length	Packaging Type	Weigth
10F6-02712NH	1000FT	Spool	25 lbs/ 11.36 kgs
10F6-02712TF	500FT	Pullbox	14 lbs/ 6.0 kgs
10F6-02712TH	1000FT	Pullbox	23 lbs/ 10.46 kgs

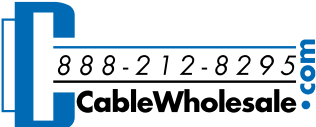Item Number:	10F6-02712xx	
Title:	Fire Alarm / Security Cable, Red, 16/2 (16 AWG 2 Conductor), Solid, FPLR	
Drawn by:	JL	
Approved by:	MAC	
ID:	123	

No.	Specifications
-----	----------------