

Rev.	Description	Date
A		01-2021


RoHS

Product Specifications


Construction & Material :

Item		Specifications
Product		Shielded Fire Alarm / Security Cable,FPLR
Conductor	Construction	Solid 2 x14AWG
	Material	Bare Copper
Insulation	Material	PVC
	Avg.thickness	0.25mm
	Diameter	2.15± 0.10 mm
	Color	Black and Red
Shield	Material	AL/Foil
Drain	Construction	24AWG(7 Strand)
	Material	Tinned Copper
Jacket	Material	PVC
	Avg.thickness	0.38 mm
	Diameter	OD Average 3.480 / Final Diameter 5.029mm
	Color	Red
Marking	STRUCTURED CABLE PRODUCTS --- P/N 14/2FPLR-SH -RISER FIRE ALARM CABLE (UL) CL2R/CL3R Exxxxxx OR FPLR SH 2/C 14 AWG SOLID PVC JKT --- ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 RoHS	
Package Weigth		35 lbs/15.91 kgs

Cross Section

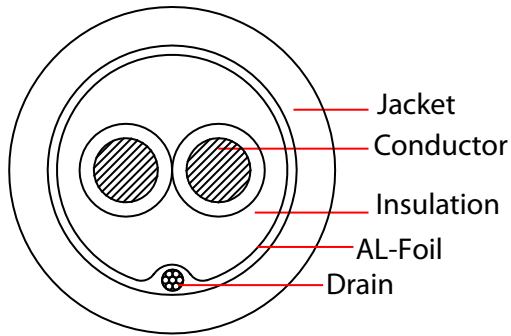

Characteristics	
Mutual Capacitance	22.9 pF/ft
DC Resistance 25°C	2.6 Ohms / 1000 ft
Impedance	70.2 Ohms
Velocity of Prop	72 %
Inductance	1.2 mH/km
Temp/Voltage	60°C / 300V
Operating Temperature	-20°C to 60°C

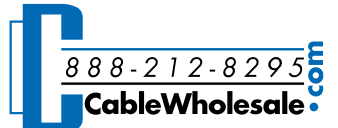Item Number:	10F7-52712NH	
Title:	Shielded Fire Alarm / Security Cable, Red, 14/2 (14 AWG 2 Conductor), Solid, FPLR, Spool, 1000 foot	
Drawn by:	JL	
Approved by:	MAC	
ID:	123	

No.	Specifications
-----	----------------