

REV.	DESCRIPTION	DATE
A		01-2018


Product Specifications

Construction & Material :

Item		Specifications
Product		UL FPLR Speaker Cable
Conductor	Construction	Solid 14AWG
	Material	Bare Copper
	Diameter	Bare Copper
Insulation	Material	PVC
	Avg.thickness	0.315mm
	Diameter	2.25 ± 0.05 mm
	Color	Red And Black
Drain	Material	7/0.25 Tinned Copper
Shielded	Material	AL/Foil
Jacket	Material	PVC
	Avg.thickness	0.450 mm
	Diameter	5.60 ± 0.20 mm
	Color	Red
Rip Cord	Material	Per Request
Marking	XXXXXX 14AWG 2/C SHIELED (UL) FPLR DEVICE/ZONE A B C D E F 1 2 3 4 5 6 7 8 RoHS****FT	

RoHS

Cross Section

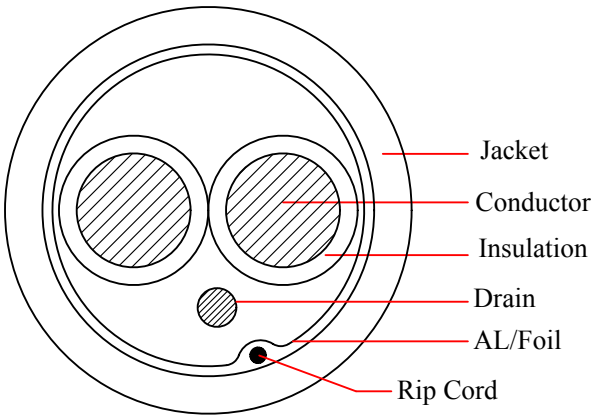

DRAWER	JL
CHECKED	
APPROVED	
⊕	⊖

	Temp/Voltage	75 °C
	PART NUMBER	TITLE
ID (NO.)	10F7-5271NH	Shielded Fire Alarm / Security Cable, Red, 14/2 (14 AWG 2 Conductor), Solid, FPLR, Spool, 1000 foot
125		

