


RoHS

Cross Section



Approval

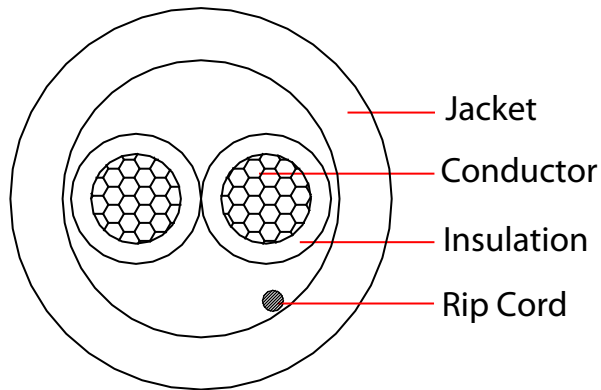

Description

- 16/2 Stranded CMR/CL3R Sound Audio Cable

Applicable Standards

- For Communication and Signal Control Systems
- 2 Oxygen Free Bare Copper Conductors in an Overall Jacket

Product Specifications

Rev.	Description	Date
A		06-2022

Construction & Material :

Item	Specifications	
Product	CMR/CL3R Speaker Cable	
Conductor	Construction	Stranded 2 x16AWG(65/0.16mm)
	Material	Bare Copper
Insulation	Material	PVC
	Avg.thickness	0.31mm
	Min.Point thickness	0.27mm
	Diameter	2.10± 0.10 mm
Jacket	Color	Black and Red
	Material	PVC
	Avg.thickness	0.50 mm
	Min.Point thickness	0.45mm
Jacket	Diameter	5.10± 0.20 mm
	Color	White
Rip Cord	Material	Nylon
Marking	AUDIO CABLE 2 COND 16AWG HI-STRAND OFC CMR/CL3R FT4 75C Exxxxxx C(ETL)US ***FT	
Conductor Resistance		15.5 (ohms)
Nominal Weight		15 (pounds)
Voltage Rating		300V (volts)

Item Number:	10G2-291SF	
Title:	Speaker Cable, White, Pure Copper, CM / In-wall rated, 16/2 (16 AWG 2 Conductor), 65 Strand / 0.16mm, Pullbox, 500 foot	
Drawn by:	JL	
Approved by:	MAC	
ID:	125	