


Rev.	Description	Date
A		05-2019

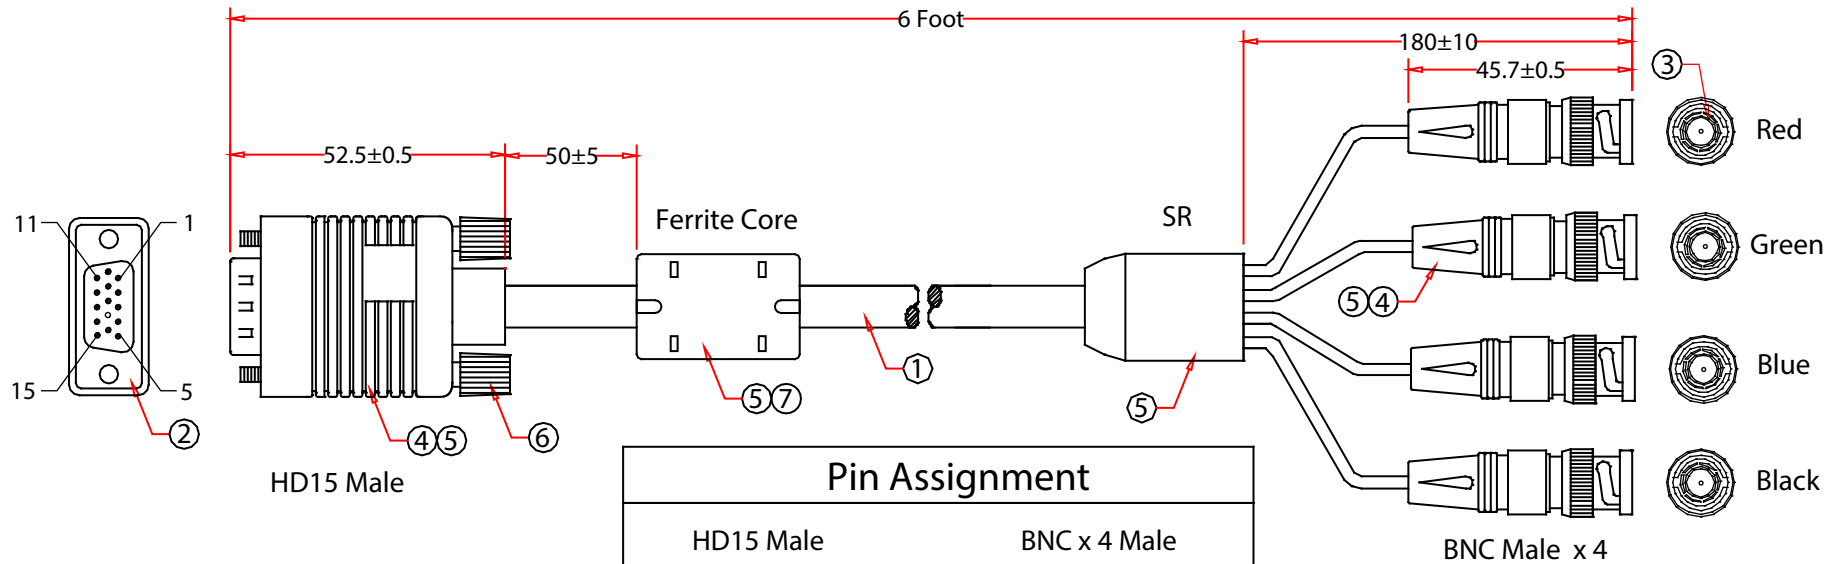

Pin Assignment	
HD15 Male	BNC x 4 Male
1	Red Conductor
6	Red Shield
2	Green Conductor
7	Green Shield
3	Blue Conductor
8	Blue Shield
13	Black Conductor
11	Black Shield
Shield	

RoHS

7	Ferrite Core 17.5*28.5*9.5mm		
6	Screw #4-40, Length 48mm, Beige Molded PVC		
5	Outer Molding PVC Beige	Item Number:	10H1-19106
4	Inner Molding PE, Color Transparent	Title:	SVGA (HD15 Male) to BNC (4 Male) Monitor Breakout Cable with Ferrite Bead, Double Shielded, 6 foot
3	BNC Male Connector, 75 Ohm, Gold Flash on Contacts, White Insulator	Drawn by:	JL
2	HD15 Male without Pin 9, Gold Flash on Contacts, Blue Insulatore, Shell Nickel Plated	Approved by:	MAC
1	UL2919 4 Mini Coaxial 28AWG, Alum-Mylar Foil and Copper Braid Shielding with Drain Wire,OD 8.5mm, Jacket PVC Beige	ID:	1
No.	Specifications	