


| REV. | DESCRIPTION | DATE |
|------|-------------|---------|
| A | | |
| B | | 10-2006 |

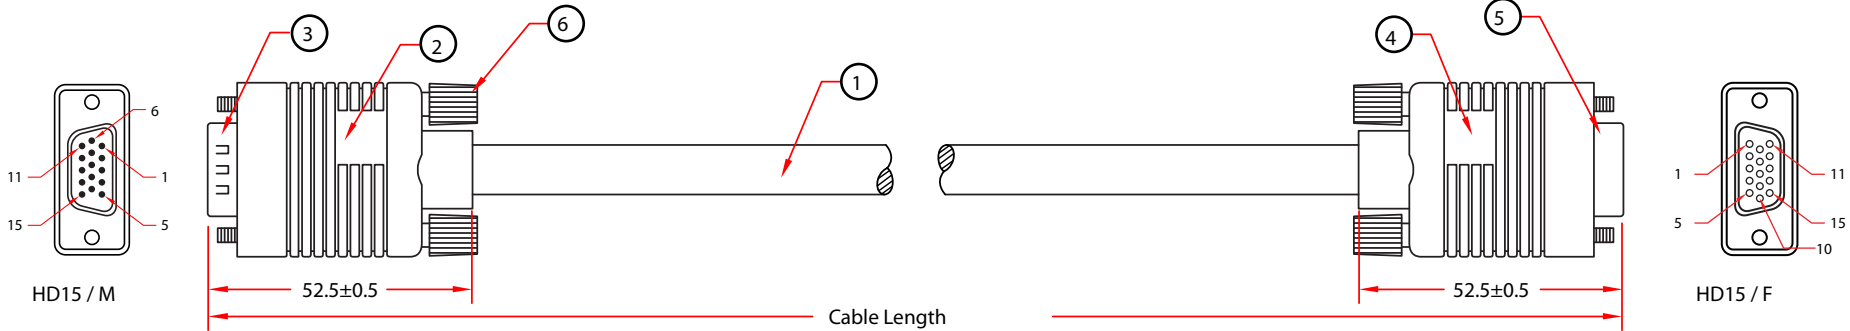

PIN ASSIGNMENT

| HD15 Male | HD15 Female | HD15 Male | HD15 Female |
|-----------|---------------------|-----------|-------------------|
| 1 | 1 Red Coax | 9 | 9 Yellow |
| 6 | 6 Red Coax Shield | 5 | 5 Red |
| 2 | 2 Green Coax | 12 | 12 Red / White |
| 7 | 7 Green Coax Shield | 10 | 10 Orange |
| 3 | 3 Blue Coax | 13 | 13 Orange / White |
| 8 | 8 Blue Coax Shield | 11 | 11 Black |
| 4 | 4 Brown | 15 | 15 Black / White |
| 14 | 14 Brown / White | Shell | Shell |

RoHS

| PART NO. | CABLE LENGTH |
|--------------|--------------|
| 10H1-20203NF | 3 ft |
| 10H1-20206NF | 6 ft |
| 10H1-20210NF | 10 ft |
| 10H1-20215NF | 15 ft |
| 10H1-20225NF | 25 ft |
| 10H1-20235NF | 35 ft |
| 10H1-20250NF | 50 ft |
| 10H1-20275NF | 75 ft |
| 10H1-202HDNF | 100 ft |

SVGA / UXGA / QXGA up to 2048 x 1536

| | |
|-----|--|
| 6 | Slotted 4/40 Molded Thumbscrew, Color: Black |
| 5 | HD15 (SVGA) Female w/Gold Plating Contacts, Blue Insulator |
| 4 | Black Molded PVC Hood, Fully Shielded w/Copper-Foil |
| 3 | HD15 (SVGA) Male w/Gold Plating Contacts, Blue Insulator |
| 2 | Black Molded PVC Hood, Fully Shielded w/Copper-Foil |
| 1 | UL2919, [3 Mini-Coaxial TC 28AWG+ TC Spiral(29/0.10mm)], 4 Twisted Pairs TC 28awg, 1 Conductor TC 28awg, + Drain Wire TC (26AWG 7*0.16mm), w/Al-Foil & Aluminum Alloy Braid(47% Coverage), Black PVC Jacket, OD: 9.0mm |
| NO. | SPECIFICATIONS |
| | BOM LIST |

| | | | | |
|----------------------|---|------|----------|-----|
| ITEM NUMBER | 10H1-202xx | | DRAWER | MPD |
| TITLE | SVGA (HD15) Male to SVGA (HD15) SVGA Female, without Ferrite Core | | CHECKED | MAC |
| MATERIAL | SCALE | | APPROVED | MAC |
| REV. | A | UNIT | INCH | |
| DRAWING NO: | | | | |
| 888-212-8295.com | | | | |