



Rev.	Description	Date
A		05-2019

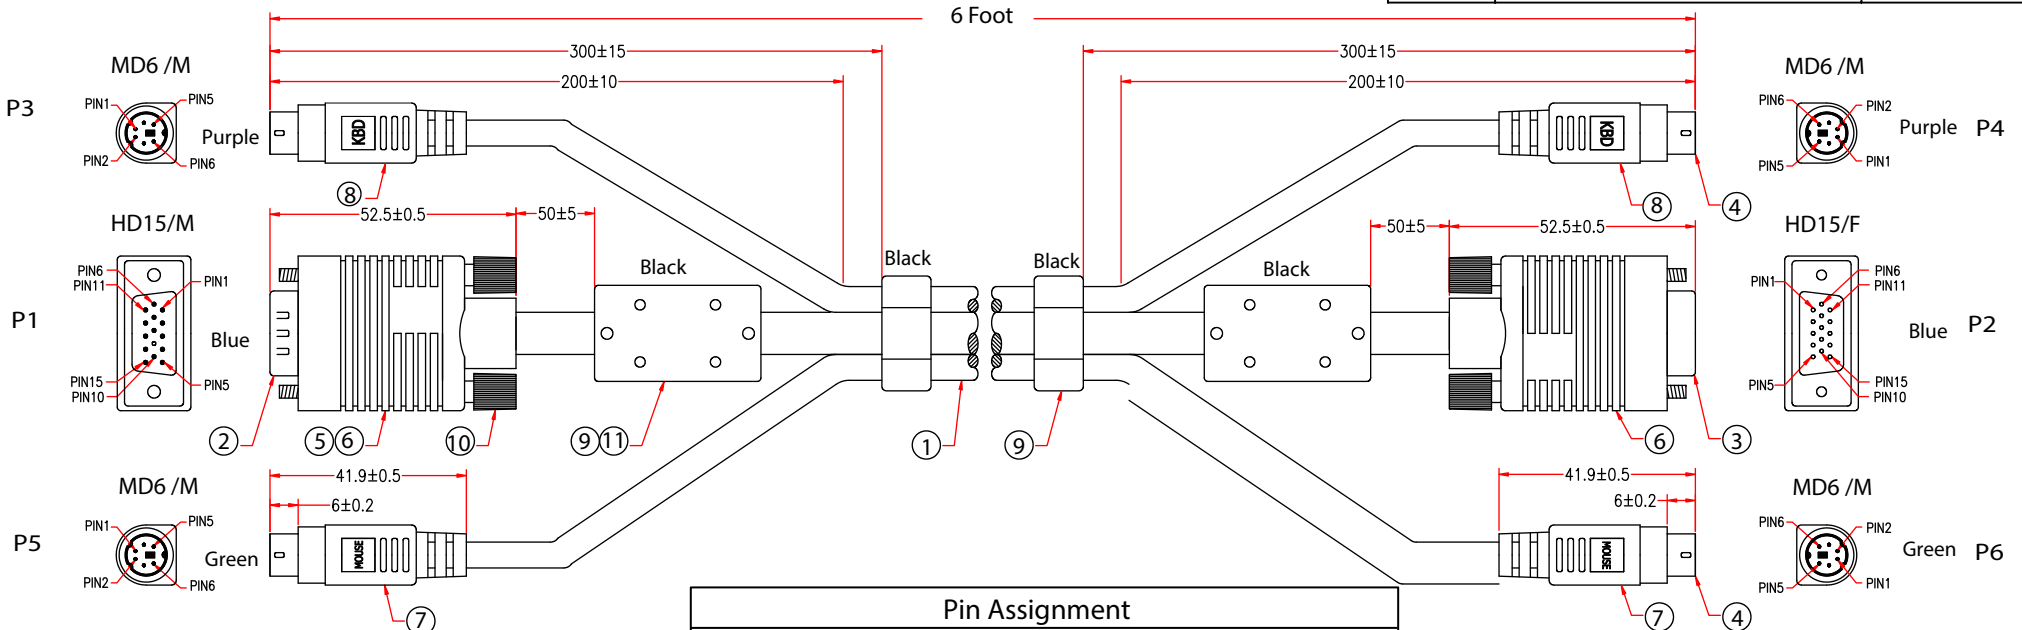

Pin Assignment			
P3	P4	P1	P2
1	1	1	1 RED CONDUCTOR
2	2	6	6 RED SHIELD
3	3	2	2 GREEN CONDUCTOR
4	4	7	7 GREEN SHIELD
5	5	3	3 BLUE CONDUCTOR
6	6	8	8 BLUE SHIELD
SHIELD	SHIELD	4	4
P5	P6	11	11
1	1	5	5
2	2	13	13
3	3	10	10
4	4	14	14
5	5	12	12
6	6	15	15
SHIELD	SHIELD	SHIELD	SHIELD

RoHS

11	Ferrite Core: 17.5*10.5*28.5mm
10	MoldedThumbscrew #4-40, Length 48mm, Black
9	Molded PVC Black (SR & Ferrite Core)
8	Molded PVC Purple (KBD)
7	Molded PVC Green (Mouse)
6	Molded PVC Blue (HD15)
5	Molded PE Color Transparent
4	Mini Din 6 Male, Gold Flash on Contacts, Black Insulator, Short Type
3	HD15 Female, Gold Flash on Contacts, Blue Insulator
2	HD15 Male without Pin 9, Gold Flash on Contacts, Blue Insulator
1	3F Cable, [(6C 28AGW+AL/Foil+Drain)+UL 2919 (3Coax 28AWG+4P 28AWG+AL +D+Braid)+(6C 28AGW+AL/Foil+Drain)]*3F, OD:5.5+9.0+5.5mm, PVC Jacket Black
No.	Specifications

Item Number:	10H1-30106BK	
Title:	KVM Cable, Black, SVGA and 2 PS/2, HD15 Male and 2 x MiniDin6 Male, 6 foot	
Drawn by:	JL	
Approved by:	MAC	
ID:	1	