



REV.	DESCRIPTION	DATE
A		10-2012

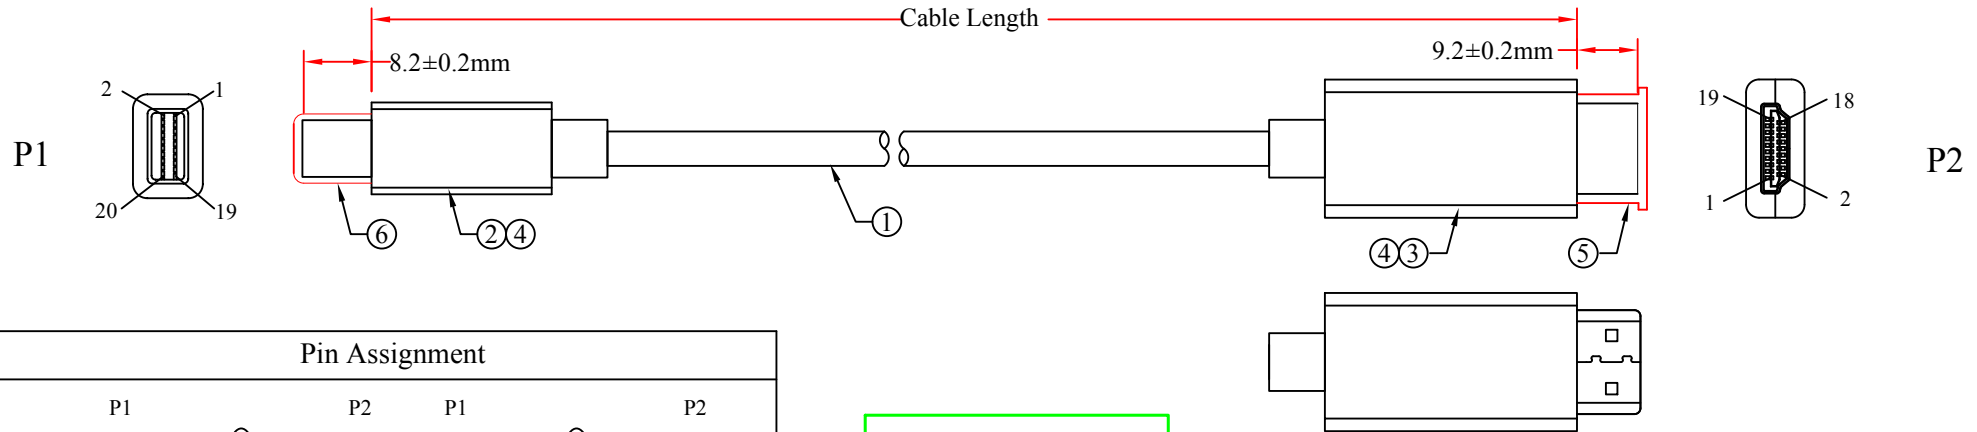

RoHS

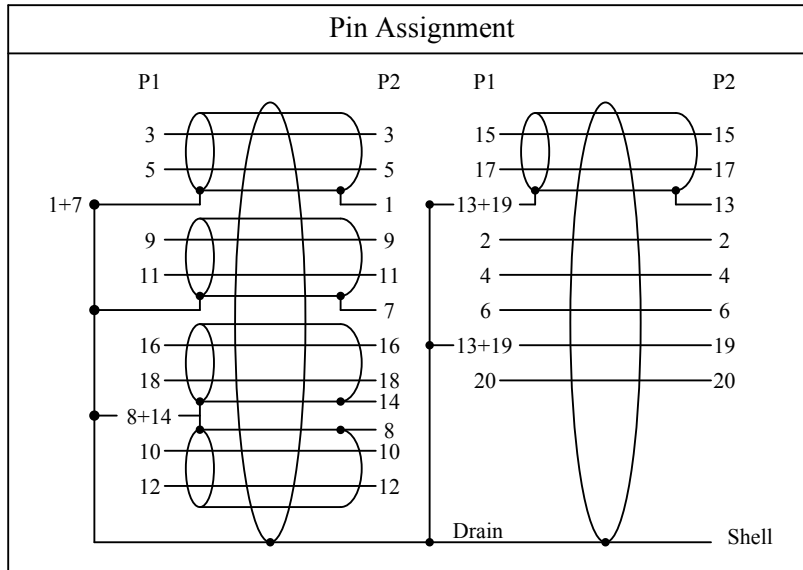

**NOTES:**

1. Electrical Test:  
 <1>. 100% Open Short & Miss Wire Test.  
 <2>. Conductor Resistance: 2 ohm Max  
 <3>. Insulation Resistance: 10M ohm Min  
 <4>. Hi-Pot: 100V DC/10ms

PART NO.	CABLE LENGTH
10H1-62303	3 FT
10H1-62306	6 FT
10H1-62310	10 FT
10H1-62315	15 FT

NO.	SPECIFICATIONS
6	Dust Cover For Mini DP
5	Dust Cover For HDMI
4	Snow White Molded PVC
3	Mini DP to HDMI Converter With VGA Male, PCB+SMT, HDMI Pin Gold Flash, Shell Gold Plated
2	Mini Display Prot Male, Insulation: White, Material: LCP, Pin Gold Flash, Shell Gold Plated ABS Plastic Hood (Snow White)
1	UL20276 [32AWG(7/0.08TC)*1P+D.W+AL+Mylar]*5+32AWG(7/0.08TC)*5C+AL/MY+D.W+Braid, OD: 4.8mm, Snow White PVC Jacket
BOM LIST	

ITEM NUMBER	10H1-623xx		DRAWER	JL
TITLE	Mini DisplayPort Male to HDMI Male Cable		CHECKED	
MATERIAL	SCALE		APPROVED	
REV.	A	UNIT	INCH	
DRAWING NO:				