



Rev.	Description	Date
A		08-2020

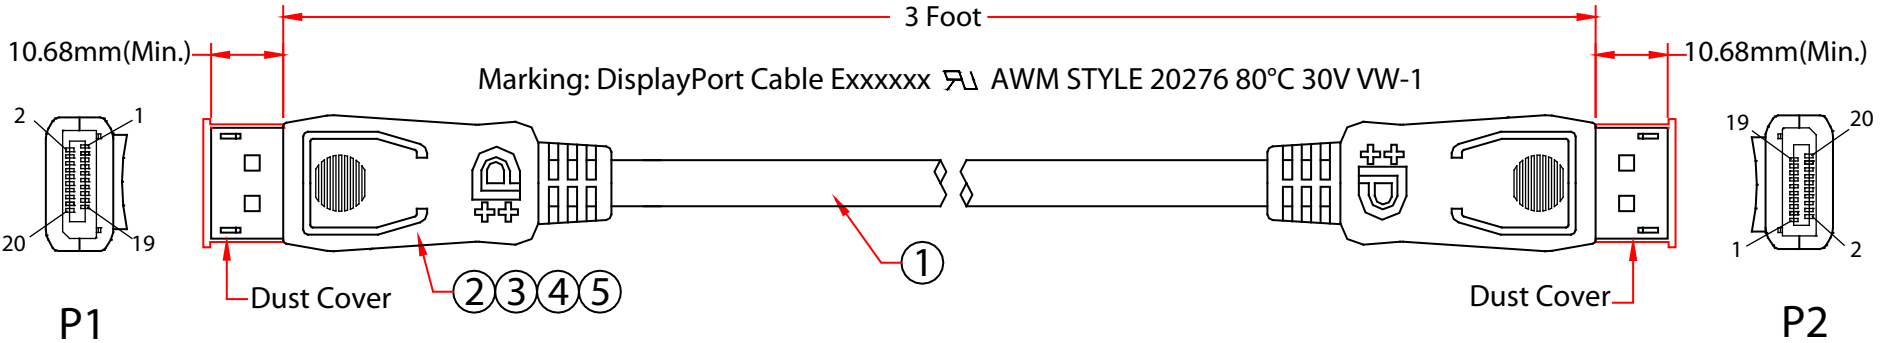

Pin Assignment

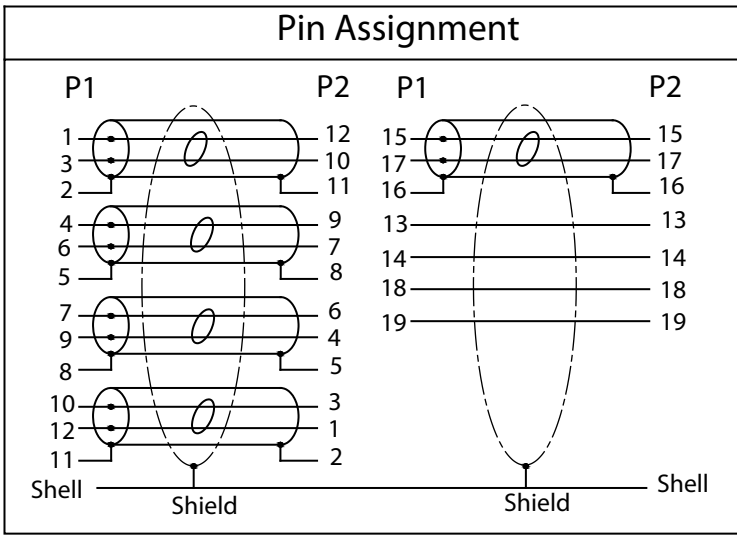

NOTES:

- 1. Electrical Test:
 - <1>. 100% Test (Open Short & Miss Wire)
 - <2>. Conductor Resistance: 2 ohm Max
 - <3>. Insulation Resistance: 10M ohm Min
 - <4>. Hi-Pot: 100V DC/10ms



5	Copper Foil: 25u W=8mm	Item Number:	10H1-70103
4	Inside Molding: LDPE	Title:	DisplayPort v1.4 Video Cable, 32.4 Gbit/s Data Rate for up to 8k@60Hz and 4k@120Hz, DisplayPort Male, 3 foot
3	Outside Molding: Black PVC		
2	DisplayPort Male, Insulation Black, Shell Gold Plated, the Tin, Black ABS Plastic Hood	Drawn by:	JL
1	DP1.4 [32AWG(7/0.08TC)+EAM]*5P+32AWG(7/0.08TC)*5C+AEB(16/7/0.12 85%AL), OD:4.8mm, Black PVC Jacket	Approved by:	MAC
No.	Specifications	ID:	1

