

REV.	DESCRIPTION	DATE
A		10-2016


Product Specifications




Construction & Material :

Item		Specifications
Product		CMR, Security/Alarm Wire
Conductor	Construction	Stranded 2 x 22AWG(7/30AWG)
	Material	Bare Copper
Insulation	Material	PE
	Avg.thickness	0.254 mm
	Diameter	1.168 mm
	Nom. Lay Length	Parallel
	Color	Black and Red
Jacket	Material	PVC
	Avg.thickness	0.381 mm
	Diameter	3.00 ± 0.10 mm
	Color	Gray
Approximate Cable Weight		9 lbs./Kft.
Flame Rating		UL 1581 vertical tray flame test

RoHS

Cross Section:

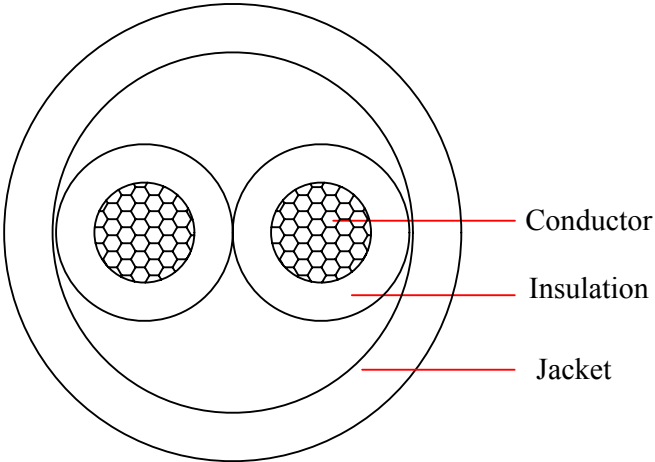

Electrical Properties:			DRAWER	JL
Nom. DC Resistance per Conductor @ 20 °C		16.19 Ohms/Kft. nom.	CHECKED	
Capacitance Between Conductors @ 1 KHz		20 pF/ft. nom.	APPROVED	
Operating Voltage		300 V RMS max.		
Temperature Rating		-20 °C to 60 °C		
ID (NO .)	PART NUMBER	TITLE		
272	10K4-0221BF	Security/Alarm Wire, Gray, 22/2 (22AWG 2 Conductor), Stranded, CMR / Inwall rated, Coil Pack, 500 foot		