

REV.	DESCRIPTION	DATE
A		10-2016

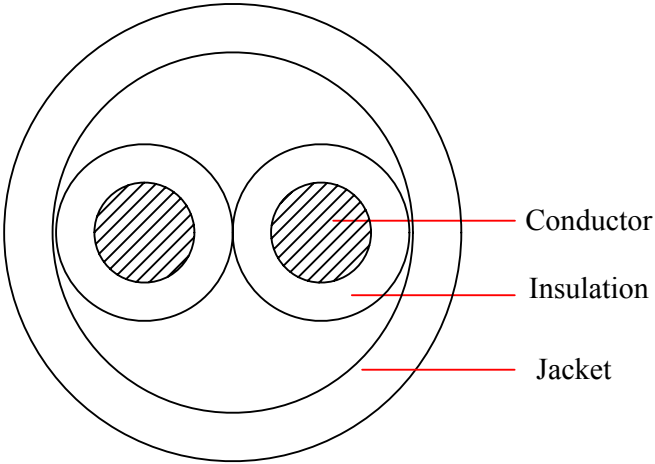
**Product Specifications**




**Construction & Material :**

Item		Specifications
Product		CMR, Security/Alarm Wire
Conductor	Construction	Solid 2 x 22AWG
	Material	Bare Copper
Insulation	Material	PE
	Avg.thickness	0.203 mm
	Diameter	0.965 mm
	Nom. Lay Length	Parallel
	Color	Black and Red
Jacket	Material	PVC
	Avg.thickness	0.381 mm
	Diameter	2.67± 0.10 mm
	Color	Blue
Approximate Cable Weight		9 lbs./Kft.
Flame Rating		UL 1581 vertical tray flame test

RoHS

Cross Section:



Electrical Properties:			DRAWER	JL
Nom. DC Resistance per Conductor @ 20 °C		16.19 Ohms/Kft. nom.	CHECKED	
Capacitance Between Conductors @ 1 KHz		30 pF/ft. nom.	APPROVED	
Operating Voltage		300 V RMS max.		
Temperature Rating		-20 °C to 60 °C		
ID ( NO .)	PART NUMBER	TITLE		
272	10K4-0261CF	Security/Alarm Wire, Blue, 22/2 (22AWG 2 Conductor), Solid, CMR / Inwall rated, Coil Pack, 500 foot		