

REV.	DESCRIPTION	DATE
A		10-2016

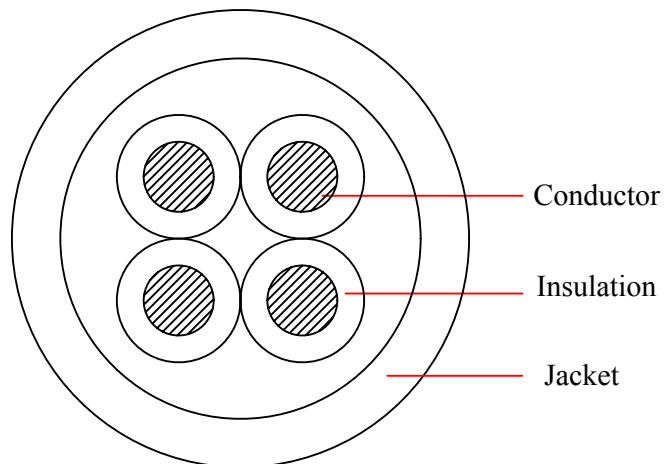
Product Specifications




Construction & Material :

Item		Specifications
Product		CMR, Security/Alarm Wire
Conductor	Construction	Solid 4 x 22AWG
	Material	Bare Copper
Insulation	Material	PVC
	Avg.thickness	0.203 mm
	Diameter	0.965 mm
	Nom. Lay Length	114.30 mm
	Color	Black, Red, White, Green
Jacket	Material	PVC
	Avg.thickness	0.381 mm
	Diameter	3.07 ± 0.1.0 mm
	Color	Gray
Approximate Cable Weight		9.52 lbs./Kft.
Flame Rating		UL 1581 vertical tray flame test

RoHS

Cross Section:



Electrical Properties:			DRAWER	JL
Nom. DC Resistance per Conductor @ 20 °C		16.19 Ohms/Kft. nom.	CHECKED	
Capacitance Between Conductors @ 1 KHz		30 pF/ft. nom.	APPROVED	
Operating Voltage		300 V RMS max.		
Temperature Rating		-20 °C to 60 °C		
ID (NO .)	PART NUMBER	TITLE		
272	10K4-0421CF	Security/Alarm Wire, Gray, 22/4 (22AWG 4 Conductor), Solid, CMR / Inwall rated, Coil Pack, 500 foot		