

REV.	DESCRIPTION	DATE
A		10-2016

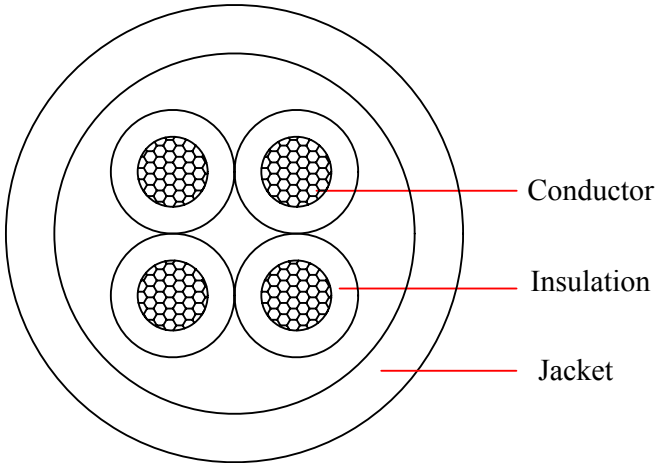
Product Specifications




Construction & Material :

Item		Specifications
Product		CMR, Security/Alarm Wire
Conductor	Construction	Stranded 4 x 22AWG(7/30AWG)
	Material	Bare Copper
Insulation	Material	PE
	Avg.thickness	0.23 mm
	Diameter	1.20 mm
	Nom. Lay Length	114.30 mm
	Color	Black, Red, White, Green
Jacket	Material	PVC
	Avg.thickness	0.38 mm
	Diameter	3.81 ± 0.1.0 mm
	Color	White
Approximate Cable Weight		15 lbs./Kft.
Flame Rating		UL 1581 vertical tray flame test

RoHS

Cross Section:



Electrical Properties:			DRAWER	JL
Nom. DC Resistance per Conductor @ 20 °C		16.19 Ohms/Kft. nom.	CHECKED	
Capacitance Between Conductors @ 1 KHz		32 pF/ft. nom.	APPROVED	
Operating Voltage		300 V RMS max.		
Temperature Rating		-20 °C to 60 °C		
ID (NO .)	PART NUMBER	TITLE		
272	10K4-0491SH	Security/Alarm Wire, White, 22/4 (22AWG 4 Conductor), Stranded, CM / Inwall rated, Pullbox, 1000 foot		