

# Product Specification


REV.	DESCRIPTION	DATE
A		
B		03-2008

## Construction & Material

Part Number	Color
1OK4-5421SH	Gray

Item	Specification
Product	CM/CL3, Security, Shielded
Conductor	Stranded 4x22AWG(7/30AWG)
Material	Bare Copper
Material	PVC
Min. thickness	
Avg. thickness	0.42 mm
Diameter	1.65 mm
Nom. Lay Length	76 mm
Color	Black, Red, White and Green
Shield	AL-Mylar
Drain Wire	Stranded 22AWG(7/30AWG) Tinned Copper
Material	PVC
Material	
Min. thickness	
Avg. thickness	0.508 mm
Diameter	5.03 mm
Color	Gray
Jacket	
Approximate Cable Weight	22 lbs./Kft

Cross Section: \_\_\_\_\_

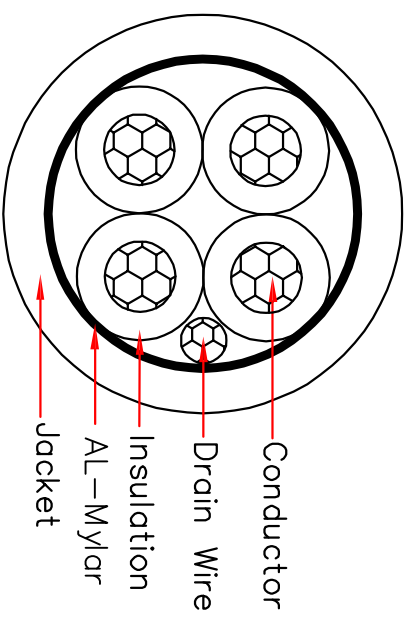

Electrical Properties:		DRAWER	LIBRA
Nom. DC Resistance per Conductor@20°C	16.19 Ohms/Kft.nom.	CHECKED	
Capacitance Between Conductors@1KHz	33 pF/ft.nom.	APPROVED	
Capacitance Between Conductors to Shield@1KHz	59 pF/ft.nom.		
Operating Voltage	300 V/RMS max.		
Temperature Rating	-20 °c to 60 °c		

PART NUMBER:	TITLE:
1OK4-5421SH	4/22 Stranded Shielded CM/CL3 Pullbox, 1000 ft

