

Product Specification


| REV. | DESCRIPTION | DATE |
|------|-------------|---------|
| A | | |
| B | | 03-2008 |

Construction & Material

| | |
|-------------|-------|
| Part Number | Color |
| 10K5-0421SF | Gray |

| Item | Specification |
|-----------------------------|---------------------------|
| Product | CM/CL3, Security |
| Conductor | Construction |
| | Stranded 4x18AWG(7/26AWG) |
| Insulation | Material |
| | Bare Copper |
| | Material |
| | PVC |
| | Min. thickness |
| | 0.254 mm |
| | Avg. thickness |
| 1.727 mm | |
| Diameter | |
| 123 mm | |
| Nom. Lay Length | |
| Black, Red, White and Green | |
| Color | |
| PVC | |
| Jacket | Min. thickness |
| | 0.508 mm |
| | Avg. thickness |
| | 5.207 mm |
| Diameter | |
| Gray | |
| Color | |
| Approximate Cable Weight | 33 lbs./Kft |

Cross Section: _____

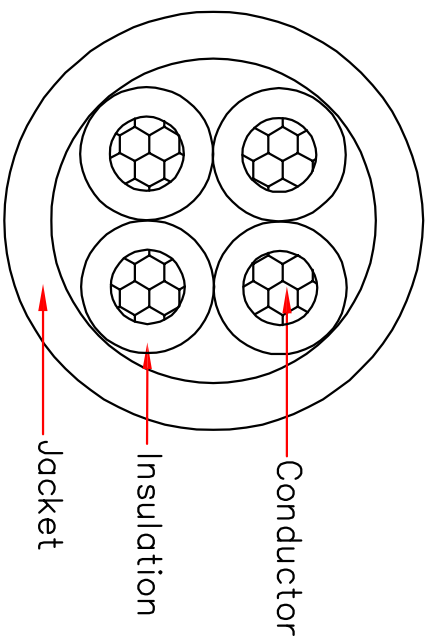

Electrical Properties:

| | | | |
|---------------------------------------|--------------------|----------|-------|
| Nom. DC Resistance per Conductor@20°C | 6.43 Ohms/Kft.nom. | DRAWER | LIBRA |
| Capacitance Between Conductors@1KHz | 35 pF/ft.nom. | CHECKED | |
| Operating Voltage | 300 V/RMS max. | APPROVED | |
| Temperature Rating | -20 °C to 60 °C | | |

| | |
|--------------|--------------------------------------|
| PART NUMBER: | TITLE: |
| 10K5-0421SF | 4/18 Stranded CM/CL3 Pullbox, 500 ft |

