

REV.	DESCRIPTION	DATE
A		10-2016

RoHS

Approvals:

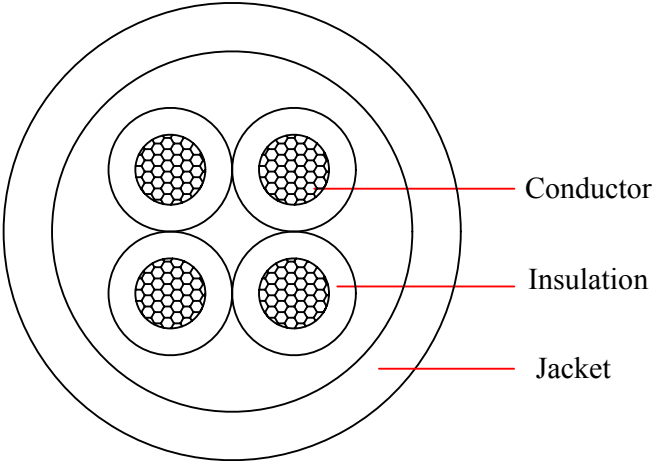
Type CMR
 UL Standard 444
 NEC Article 800
 UL 1581



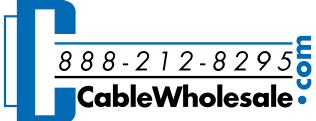
Product Specifications

Construction & Material :

Item		Specifications
Product		CMR, Security/Alarm Wire
Conductor	Construction	Stranded 4 x 18AWG(7/26AWG)
	Material	Bare Copper
Insulation	Material	PVC
	Avg.thickness	0.254 mm
	Diameter	1.528 mm
	Color	Black, Red, White, Green
Jacket	Material	PVC
	Avg.thickness	0.508 mm
	Diameter	5.00 ± 0.20 mm
	Color	Gray
Approximate Cable Weight		42 lbs./Kft.

Cross Section:



Electrical Properties:			DRAWER	JL
Nom. DC Resistance per Conductor @ 20 °C		6.39 Ohms/M'	CHECKED	
Capacitance Between Conductors @ 1MHz		38 pF/ft. nom.	APPROVED	
Operating Voltage		300 Volt	 	
Temperature Rating		-20 °C to 75 °C		
ID (NO .)	PART NUMBER	TITLE		
272	10K5-0421SH	Security/Alarm Wire, Gray, 18/4 (18AWG 4 Conductor), Stranded, CMR / Inwall rated, Pullbox, 1000 foot		