

Product Specification


Construction & Material

| REV. | DESCRIPTION | DATE |
|------|-------------|---------|
| A | | |
| B | | 03-2008 |

| | |
|-------------|-------|
| Part Number | Color |
| 10K6-0221SH | Gray |

| Item | Specification | |
|--------------------------|------------------|----------------------------|
| Product | CM/CL3, Security | |
| Conductor | Construction | Stranded 2x16AWG(19/29AWG) |
| | Material | Bare Copper |
| Insulation | Material | PVC |
| | Min. thickness | |
| | Avg. thickness | 0.254 mm |
| | Diameter | 1.93 mm |
| | Nom. Lay Length | Parallel |
| | Color | Black and Red |
| Jacket | Material | PVC |
| | Min. thickness | |
| | Avg. thickness | 0.508 mm |
| | Diameter | 5.334 mm |
| | Color | Gray and White |
| Approximate Cable Weight | | 30 lbs./Kft |

Cross Section: _____

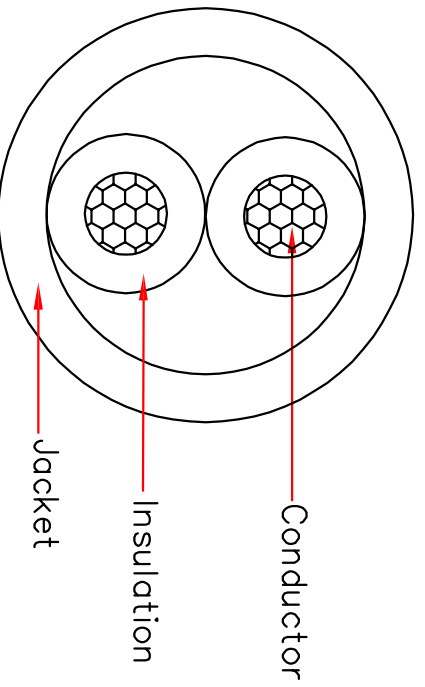

| Electrical Properties: | | DRAWER | LIBRA |
|---------------------------------------|--------------------|----------|-------|
| Nom. DC Resistance per Conductor@20°C | 4.02 Ohms/Kft.nom. | CHECKED | |
| Capacitance Between Conductors@1KHz | 35 pF/ft.nom. | APPROVED | |
| Operating Voltage | 300 V/RMS max. | | |
| Temperature Rating | -20 °C to 60 °C | | |

| | |
|--------------|---------------------------------------|
| PART NUMBER: | TITLE: |
| 10K6-0221SH | 2/16 Stranded CM/CL3 Pullbox, 1000 ft |

