


Rev.	Description	Date
A		06-2019

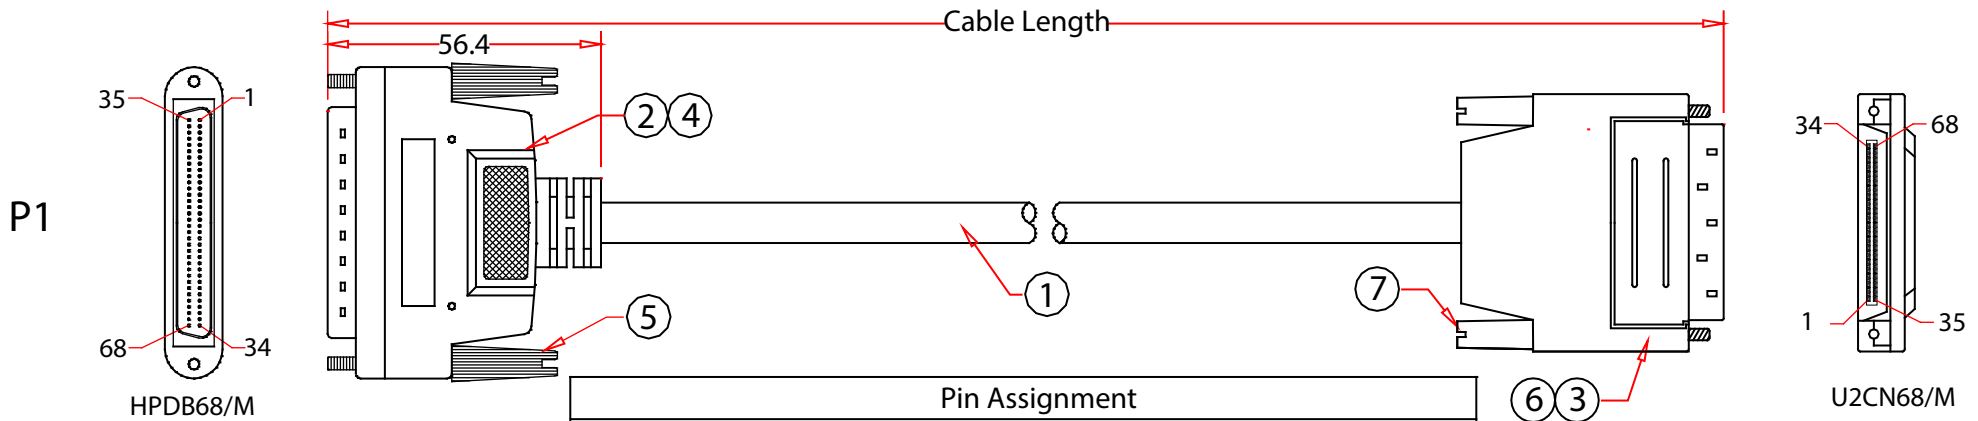


P1	P2	P1	P2	P1	P2
1	1	13	13	25	25
35	35	47	47	59	59
2	2	14	14	26	26
36	36	48	48	60	60
3	3	15	15	27	27
37	37	49	49	61	61
4	4	16	16	28	28
38	38	50	50	62	62
5	5	17	17	29	29
39	39	51	51	63	63
6	6	18	18	30	30
40	40	52	52	64	64
7	7	19	19	31	31
41	41	53	53	65	65
8	8	20	20	32	32
42	42	54	54	66	66
9	9	21	21	33	33
43	43	55	55	67	67
10	10	22	22	34	34
44	44	56	56	68	68
11	11	23	23	Shield	Shield
45	45	57	57		
12	12	24	24		
46	46	58	58		

RoHS

PART NO.	CABLE LENGTH
10N3-01103	3 FT
10N3-01106	6 FT

7	Screw 5*44.6mm
6	Metal Hood

5	Black PVC Molded Thumbscrew #2-56
4	Black Molded PVC Hood
3	U2CN68 Male, Gold Flash on Contacts, Balck Insulator
2	HPDB68P Male, Gold Flash on Contacts, Balck Insulator
1	UL20276 34 Twisted Pairs 30AWG, Alum-Mylar and Copper Braid Foil Shielded with Drain Wire, OD:10.0mm, PVC Jacket Color Black
No.	Specifications

Item Number:	10N3-011xx	
Title:	SCSI III Cable, VHDCI 68 (0.8mm) Male to HPDB68 (Half Pitch DB68) Male, Offset Orientation	
Drawn by:	JL	
Approved by:	MAC	
ID:	1	