


REV.	DESCRIPTION	DATE
A		01-2015

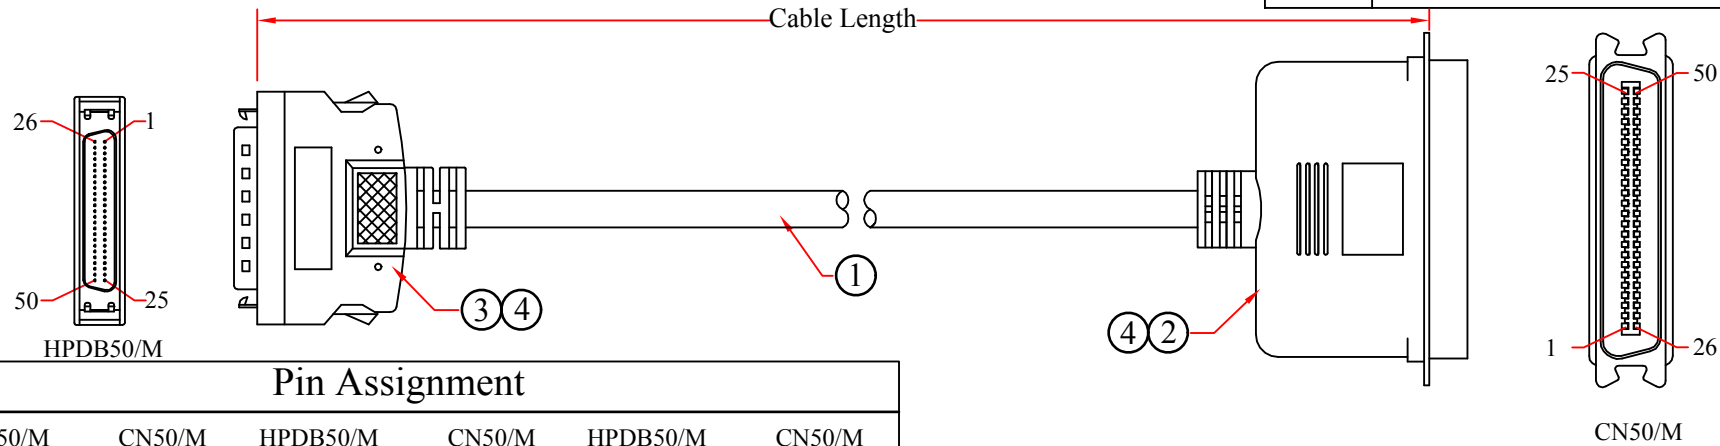

Pin Assignment

HPDB50/M	CN50/M	HPDB50/M	CN50/M	HPDB50/M	CN50/M
1	1	10	10	19	19
26	26	35	35	44	44
2	2	11	11	20	20
27	27	36	36	45	45
3	3	12	12	21	21
28	28	37	37	46	46
4	4	13	13	22	22
29	29	38	38	47	47
5	5	14	14	23	23
30	30	39	39	48	48
6	6	40	40	49	49
31	31	16	16	25	25
7	7	41	41	50	50
32	32	17	17		
8	8	42	42	Shield	Braid+Drain
33	33	18	18		Shield
9	9	43	43		
34	34				

RoHS

PART NO	CABLE LENGTH
10P1-0111H	1.5 ft
10P1-01103	3 ft
10P1-01106	6 ft
10P1-01110	10 ft

ITEM NUMBER	10P1-011xx		DRAWER	JL
TITLE	SCSI II cable, HPDB50 (Half Pitch DB50) Male to Centronics 50 (CN50) Male, 25 Twisted Pairs		CHECKED	
MATERIAL	SCALE		APPROVED	
REV.	A	UNIT	INCH	
DRAWING NO:				

4	Beige Molded PVC Hood, Fully Shielded w/Copper Foil
3	HPDB50P Male w/Gold Plating Contacts
2	CN50P Male w/Gold Plating Contacts
1	UL2990, 25 Twisted Pairs 28AWG+Drain, Double Shielded with AL-Foil & Copper Braid, Beige Outer PVC Jacket
NO.	SPECIFICATIONS
BOM LIST	