



RoHS

REV.	DESCRIPTION	DATE
A		03-2016

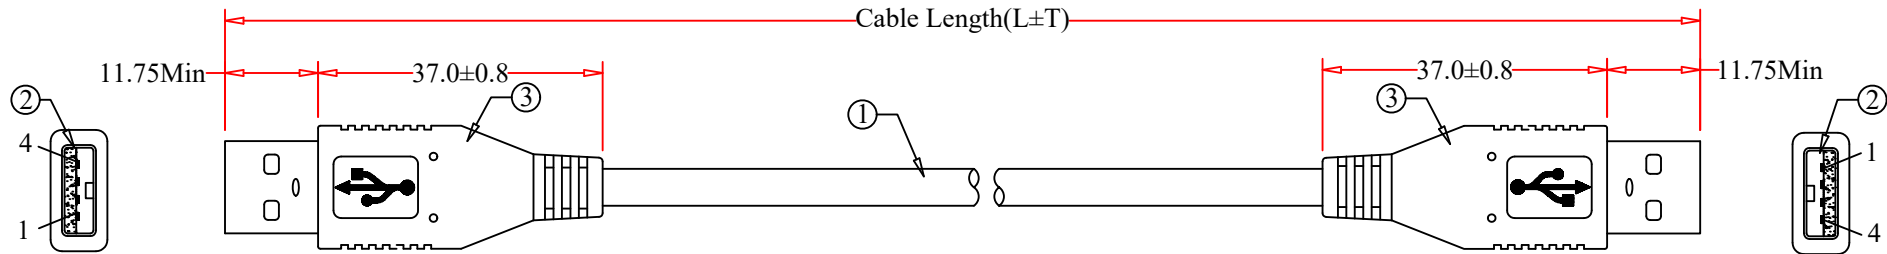

USB A/M

USB A/M

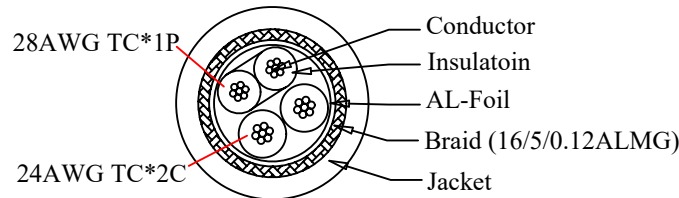

Cross-Section

Pin Assignment		
USB AM		USB AM
1	Red	1
2	Green	2
3	White	3
4	Black	4
Shell	Braid	Shell

NOTES:

- 1. Electrical Test:
- (1) 100% Open Short & Miswire Test.
- (2) Insulation Resistance 1 MΩ MIN.

PART NO.	CABLE LENGTH	
	L	±T(mm)
10U2-02101BK	1 FT	-10/+30
10U2-02102BK	2FT	±30
10U2-02103BK	3 FT	±30
10U2-02106BK	6 FT	±50
10U2-02110BK	10 FT	±50
10U2-02115BK	15 FT	±50

3	Black Molded PVC
2	USB A Type Male ,Contact:Gold Flash, Shell: Nickel Plated, Insulation White
1	USB 2.0 Cable: UL 2725 28AWG*1P+24AWG*2C+AB(16/5/0.12ALMG), OD: 4.5±0.15mm, Black Outer PVC Jacket
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	10U2-021xxBK		DRAWER	JL
TITLE	USB 2.0 Type A Male to Type A Male Cable Black		CHECKED	
MATERIAL	SCALE		APPROVED	
REV.	A	UNIT	INCH	
DRAWING NO:			 888-212-8295.com CableWholesale.com	
ID(NO.)	124			