



RoHS

REV.	DESCRIPTION	DATE
A		03-2016

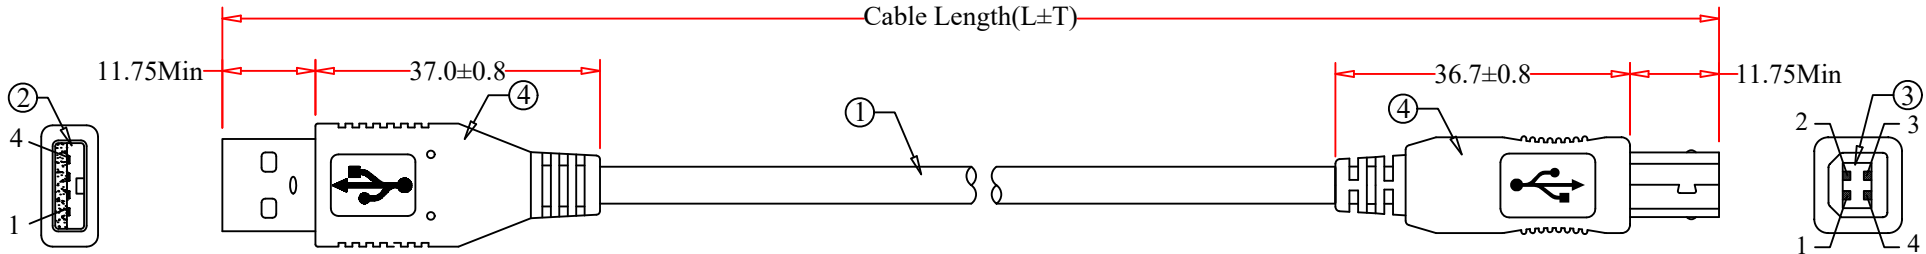

USB A/M

USB B/M

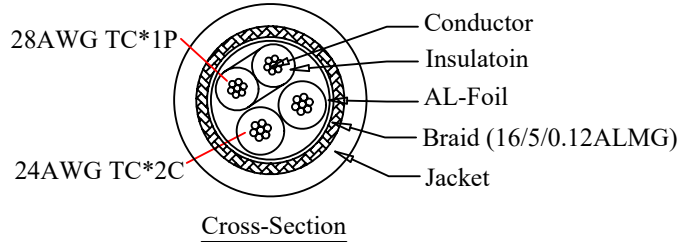

Pin Assignment		
USB AM		USB BM
1	Red	1
2	Green	2
3	White	3
4	Black	4
Shell	Braid	Shell

PART NO.	CABLE LENGTH	
	L	±T(mm)
10U2-02201BK	1 FT	-10/+30
10U2-02203BK	3 FT	±30
10U2-02206BK	6 FT	±50
10U2-02210BK	10 FT	±50
10U2-02215BK	15 FT	±50

NOTES:

1. Electrical Test:
 - (1) 100% Open Short & Miswire Test.
 - (2) Insulation Resistance 1 MΩ MIN.

4	Black Molded PVC
3	USB B Type Male ,Contact:Gold Flash, Shell: Nickel Plated, Insulation White
2	USB A Type Male ,Contact:Gold Flash, Shell: Nickel Plated, Insulation White
1	USB 2.0 Cable: UL 2725 28AWG*1P+24AWG*2C+AB(16/5/0.12ALMG), OD: 4.5±0.15mm, Black Outer PVC Jacket
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	10U2-022xxBK			DRAWER	JL
TITLE	USB 2.0 Type A Male to Type B Male Cable Black			CHECKED	
MATERIAL		SCALE		APPROVED	
REV.	A	UNIT	INCH		
DRAWING NO:				 888-212-8295.com	
ID(NO.)	124				