


REV.	DESCRIPTION	DATE
A		08-2015

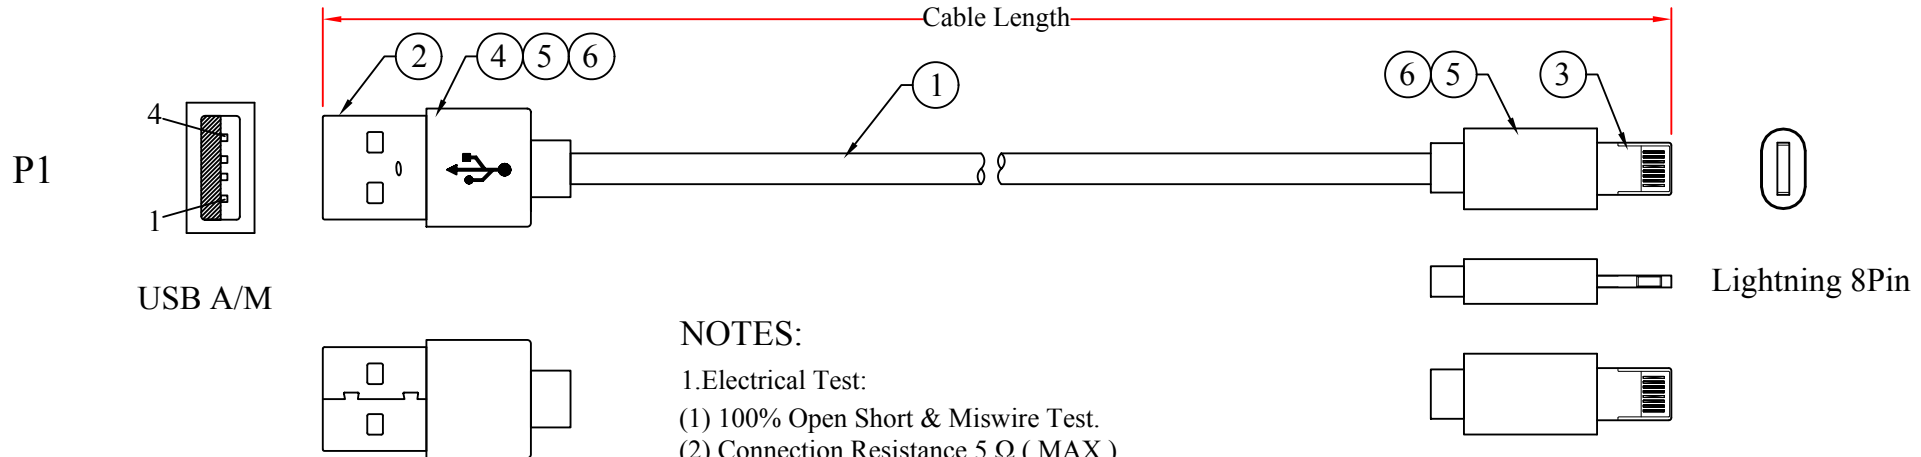

USB A/M

Lightning 8Pin

**NOTES:**

1. Electrical Test:
  - (1) 100% Open Short & Miswire Test.
  - (2) Connection Resistance 5 Ω ( MAX.)
  - (3) Insulation Resistance 5 MΩ ( MIN. AT DC250V/10ms)
2. USB A to IP5 finished Products
  - (1) In-Put : DC5.0~5.25V
  - (2) No-Load Output : 5.0~5.25V  
D+ : 2.60~2.80V  
D- : 1.80~2.10V
3. Loading 2.1A Output : ATS Tesh: 4.55~5.25V
4. 100% Test with Apple Device: Transmission & Charging

Back Side

Pin Assignment		
P1	Wire Color	P2
1	Black	4
2	White	3
3	Green	2
4	Red	1
Shell	Braid	Shell

PART NO.	ABS COVER & CABLE COLOR	CABLE LENGTH
10U2-05101.5WH	WHITE	1.5 FT
10U2-05103BK	BLACK	3 FT
10U2-05103WH	WHITE	3 FT
10U2-05106BK	BLACK	6 FT
10U2-05106WH	WHITE	6 FT

6	Outer Mold, PVC	ITEM NUMBER	10U2-051xxWH & BK		DRAWER	JL
5	Inner Mold, LDPE	TITLE	Apple Lightning Authorized iPhone, iPad, iPod USB Charge and Sync Cable		CHECKED	
4	Right & Left Shell	MATERIAL		SCALE	APPROVED	
3	MFI iPhone 5 c48b Male Body	REV.	A	UNIT		
2	USB A Type Male ,Contact: Gold Flash, Shell: Nickel Plated	DRAWING NO:		MM		
1	IPOD Cable: 24AWG*2C+30AWG*2C+F+AB,OD 3.0mm, PVC Jacket	NO.( ID )	85			
NO.	SPECIFICATIONS					
BOM LIST						