


Rev.	Description	Date
A		07-2021

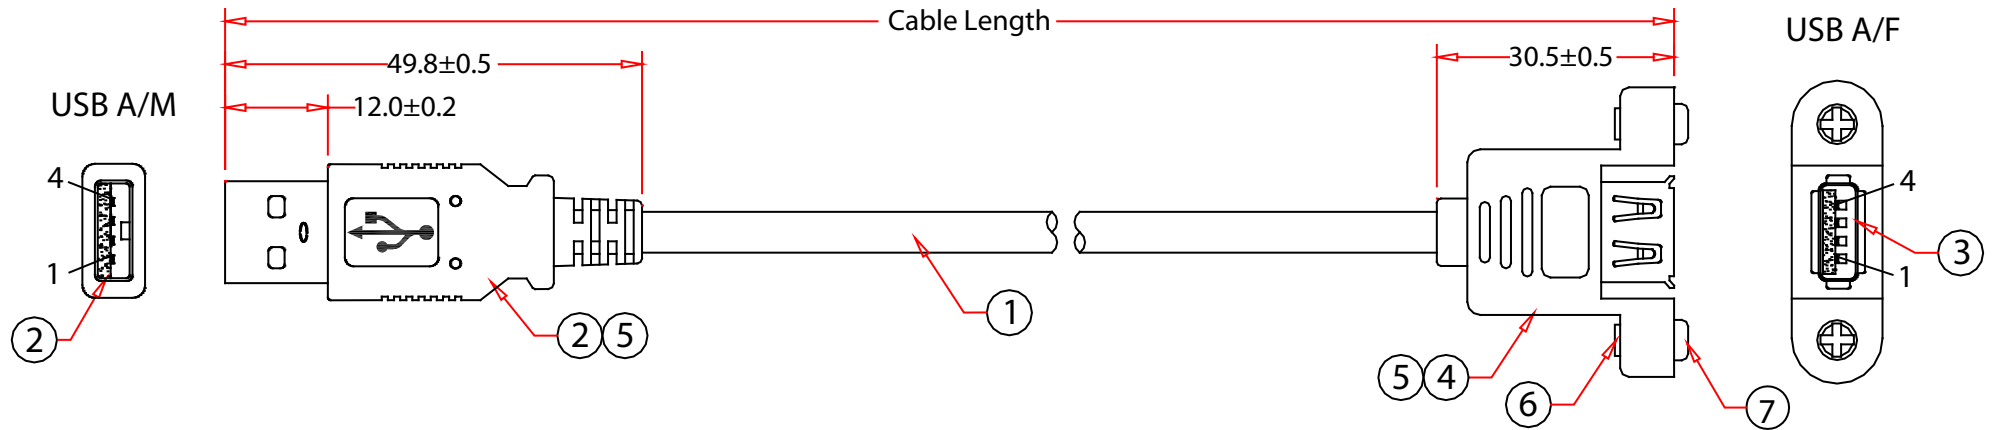

Pin Assignment			
USB AM	USB AF		
1	Red	1	24AWG
2	Green	2	
3	White	3	
4	Black	4	24AWG
Shell	Braid	Shell	


RoHS

NOTES:

- 1. Electrical Test:
- (1) 100% Open Short & Miswire Test.
- (2) Insulation Resistance 1 MΩ MIN.

PART NO.	CABLE LENGTH
10U2-24101	1 FT
10U2-24103	3 FT
10U2-24106	6 FT
10U2-24108	8 FT
10U2-24110	10 FT
10U2-24115	15 FT

7	Screw 5.5*8.0mm
6	Hex-Nut 5*7.7mm
5	Black Molded PVC
4	Inner Molded PE, Color Transparent
3	USB A Type Female ,Gold Flash on Contact,White Insulation
2	USB A Type Male ,Gold Flash on Contact, White Insulation, Crimp Two Pierce Type
1	USB 2.0 Cable, UL 2725 28AWG*1P+24AWG*2C+AL+AMA Braid, OD: 4.5mm, Black Outer PVC Jacket
No.	Specifications

Item Number:	10U2-241xx	
Title:	USB 2.0 Panel Mount Extension Cable, Type A Male to Panel Mount Female, Black	
Drawn by:	JL	
Approved by:	MAC	
ID:	1	