


REV.	DESCRIPTION	DATE
A		01-2018

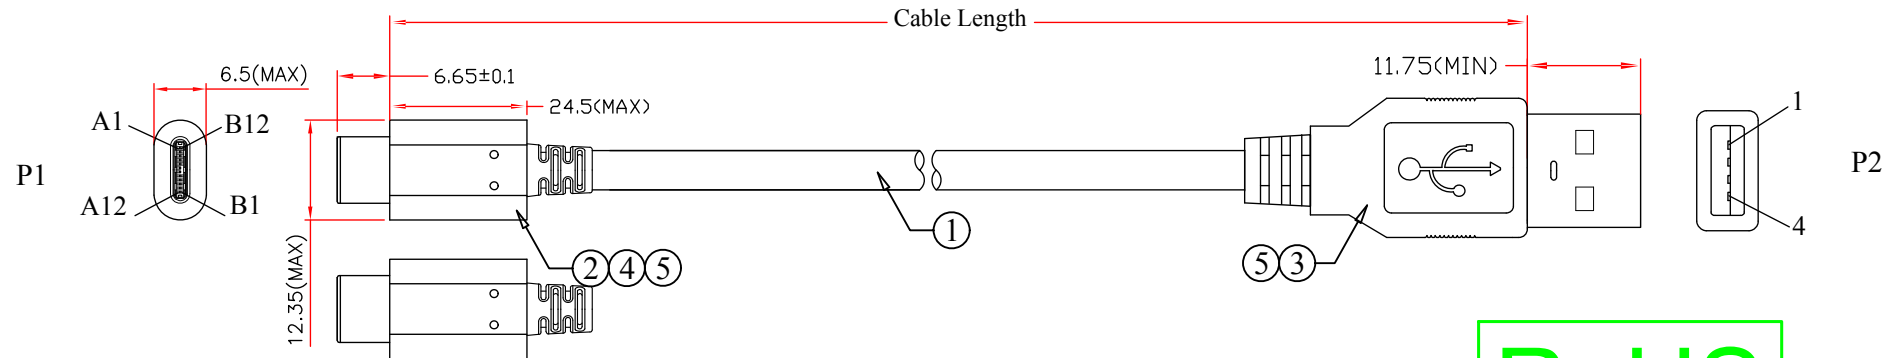

RoHS

Pin Assignment	
	P2
A4+B4+A9+B9	Red — 1 24#
A5	(56K Ω ± 5%)0420
A7	Green — 2
A6	White — 3
A1+B1+A12+B12	Black — 4 24#
Shield	Shield

**NOTES:**

1. Electrical Test:

- (1) 100% Open Short & Miswire Test.
- (2) Insulation Resistance: DC 300V ≥ 5MΩ
- (3) Conductor Resistance: ≤ 2 Ω

PART NO.	CABLE LENGTH
10U2-32003	3 FT
10U2-32006	6 FT
10U2-32010	10 FT

	Molded Black PVC Hood	ITEM NUMBER	10U2-320xx		DRAWER	JL
5	PE Matural	TITLE	USB2.0 Type A Male to Type C Male, 480mb		CHECKED	
4	USB A Type Male ,Gold Flash on Contacts, White Insulation, Solder Type	MATERIAL		SCALE	APPROVED	
3	USB2.0 C Type Male ,Black Insulation, Solder Type, (56K Ω ± 5%)0420 ( Type C 2.0 )	REV.	A	UNIT	MM	
2	USB 2725 28AWG*1P+24AWG*2C+ADB,OD: 4.5mm, Black Outer PVC Jacket	DRAWING NO:			<b>888-212-8295.com</b> <b>CableWholesale.com</b>	
1		ID(NO.)	44			
NO	SPECIFICATIONS					
	BOM LIST					