


Rev.	Description	Date
A		08-2019

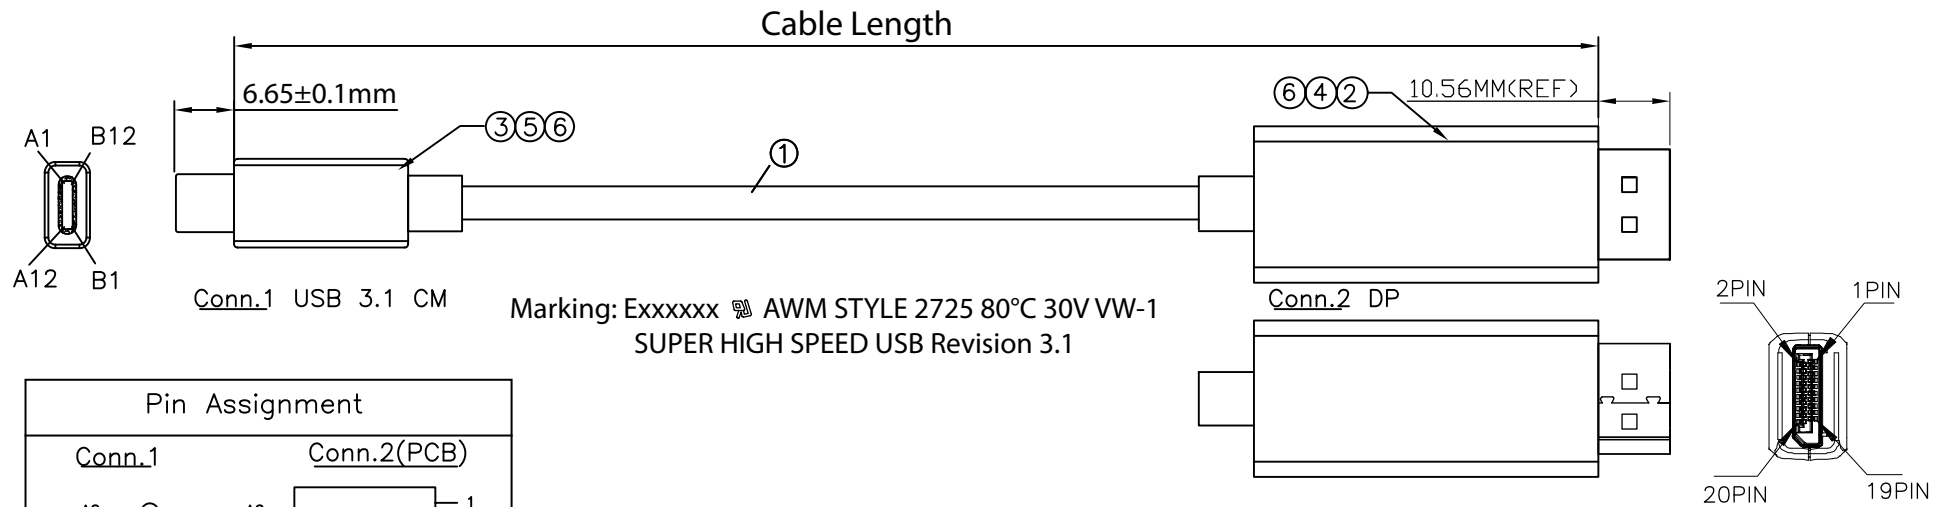

Pin Assignment	
Conn.1	Conn.2(PCB)
A2	A2
A3	A3
A5	A5
A6	A6
A7	A7
A8	A8
A10	A10
A11	A11
B2	B2
B3	B3
B5	B5
B8	B8
B9	B9
B10	B10
B11	B11
B12	B12
	1
	2
	3
	4
	5
	6
	7
	8
	9
	10
	11
	12
	13
	14
	15
	16
	17
	18
	19
	SHELL


RoHS

Electrical Performance Test: Type C to DP Machine Testing

1. The Video Has no Signal Jitter, Smearing, Ghosting, Missing Color and Other Abnormal Displaying.

2. TV or Monitor: 4K*2K/60Hz

PART NO.	CABLE LENGTH
10U2-36003	3 ft
10U2-36006	6 ft

6	Molding PVC, White	Item Number:	10U2-360xx	
5	Plastic Hood or USB3.1 Type C, Material ABS, Color White		Title:	USB-C video cable, USB-C device to DP display, White
4	Plastic Hood or DP, Material ABS, Color White	Drawn by:		JL
3	USB3.1 C Male, Solder Type, Shell Gold Plated, Ecrú Insulation		Approved by:	MAC
2	Type C to DP Male, PCBA(IC:VL100), Shell Gold Plated, Black Insulation	ID:		108
1	USB3.1 [32#(7/0.08TC)*1P+D(7/0.08TC)+AL+MY]*4+32#(7/0.08TC)*1P+32#(7/0.08TC)*4C+22#(65/0.08TC)*2C+F+AB(16/9/0.08TC), OD4.5mm, White PVC Jacket			
No.	Specifications			