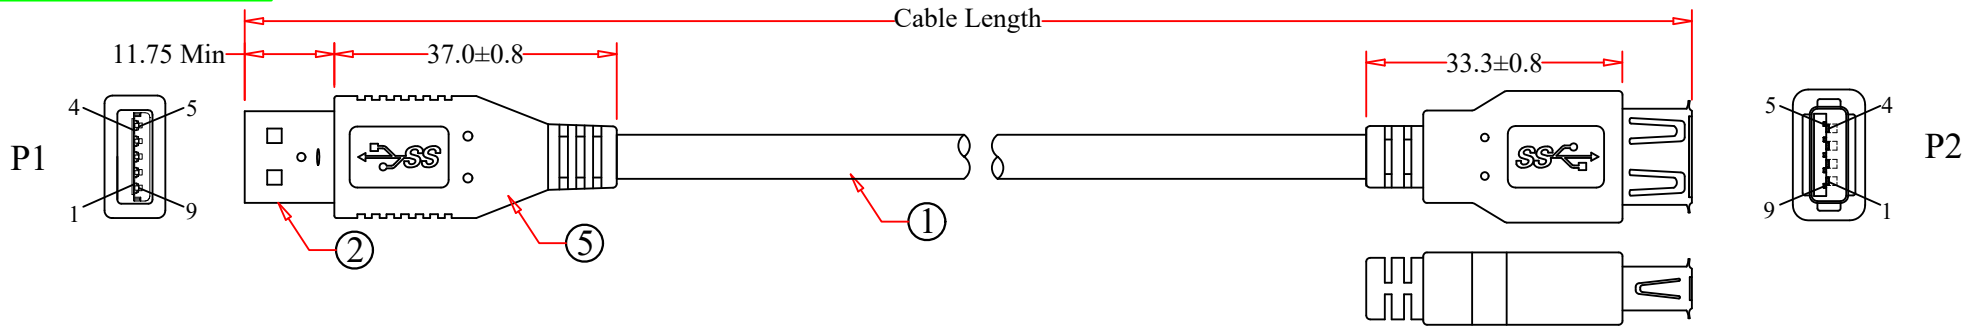
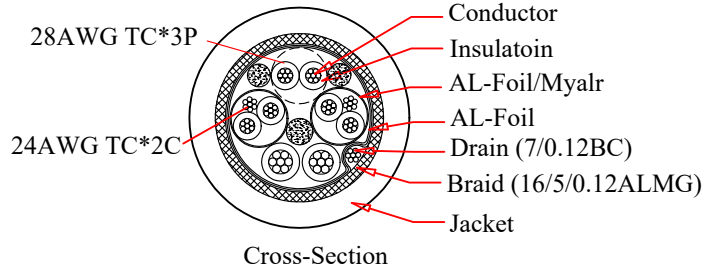


RoHS

REV.	DESCRIPTION	DATE
A		03-2016






Pin Assignment		
P1		P2
1	Red	1
2	Green	2
3	White	3
4	Black	4
5	Blue(Yellow)	5
6	White(Blue)	6
7	Drain	7
8	Red(Orange)	8
9	White(Purple)	9
Shell	Braid+Drain	Shell



NOTES:
 1. Electrical Test:
 (1) 100% Open Short & Miswire Test.
 (2) Insulation Resistance 1 MΩ MIN.

PART NO.	CABLE LENGTH	
	L	±T(mm)
10U3-02101EBK	1 FT	-10/+50
10U3-02103EBK	3 FT	±50
10U3-02106EBK	6 FT	±50
10U3-02110EBK	10 FT	±50

5	Black Molded PVC
4	Inner Molded LD-PE
3	USB3.0 Type A Female, Contact:Gold Flash, Shell: Nickel Plated, Insulation Blue
2	USB3.0 Type A Male, Contact:Gold Flash, Shell: Nickel Plated, Insulation Blue
1	UL2725[28AWG(7/0.127TC)*1P+D(7/0.12TC)+AL-Foil+Mylar]*2C+28AWG(7/0.27TC)*1P+24AWG(7/0.20TC)*2C+AEB(16/5/0.12ALMG),OD: 5.5±0.2mm, Black Outer PVC Jacket
NO.	SPECIFICATIONS

ITEM NUMBER	10U3-021xxEBK		DRAWER	JL
TITLE	USB 3.0 Cable, Black Type A Male / Type A Female		CHECKED	
MATERIAL	SCALE		APPROVED	
REV.	A	UNIT	INCH	 
DRAWING NO:				
ID(NO.)	124			

BOM LIST