



RoHS

REV.	DESCRIPTION	DATE
A		03-2016

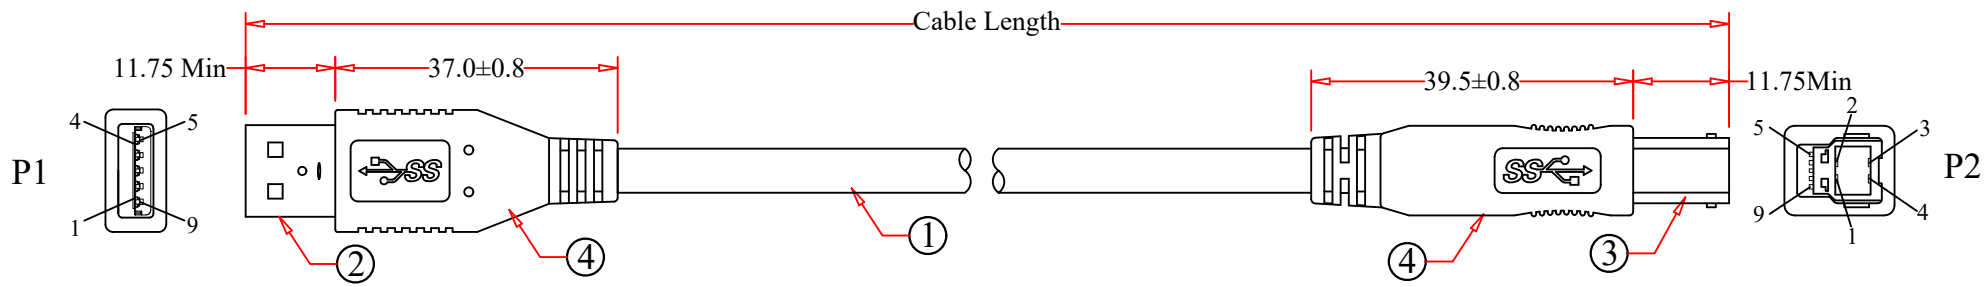

Pin Assignment		
P1		P2
1	Red	1
2	Green	2
3	White	3
4	Black	4
5	Blue(Yellow)	5
6	White(Blue)	6
7	Drain	7
8	Red(Orange)	8
9	White(Purple)	9
Shell	Braid+Drain	Shell

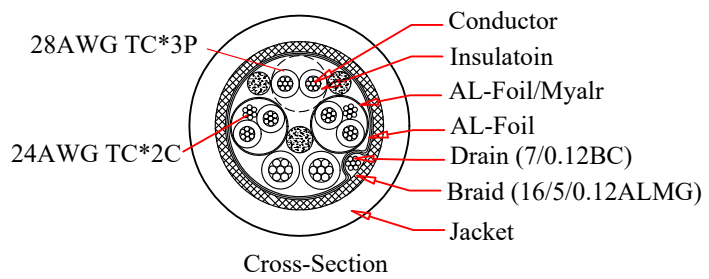

NOTES:
 1. Electrical Test:
 (1) 100% Open Short & Miswire Test.
 (2) Insulation Resistance 1 MΩ MIN.

PART NO.	CABLE LENGTH	
	L	±T(mm)
10U3-02201	1 FT	-10/+50
10U3-02203	3 FT	±50
10U3-02206	6 FT	±50
10U3-02210	10 FT	±50

NO.	SPECIFICATIONS
5	
4	Blue Molded PVC
3	USB3.0 Type B Male, Contact:Gold Flash, Shell: Nickel Plated, Insulation Blue
2	USB3.0 Type A Male, Contact:Gold Flash, Shell: Nickel Plated, Insulation Blue
1	UL2725[28AWG(7/0.127TC)*1P+D(7/0.12TC)+AL-Foil+Mylar]*2C+28AWG(7/0.27TC)*1P+24AWG(7/0.20TC)*2C+AEB(16/5/0.12ALMG),OD: 5.5±0.2mm, Blue Outer PVC Jacket
BOM LIST	

ITEM NUMBER	10U3-022xx		DRAWER	JL
TITLE	USB 3.0 Cable, Blue Type A Male / Type B Male		CHECKED	
MATERIAL		SCALE		
REV.	A	UNIT	INCH	
DRAWING NO:			 888-212-8295.com	
ID(NO.)	124			