


REV.	DESCRIPTION	DATE
A		01-2018

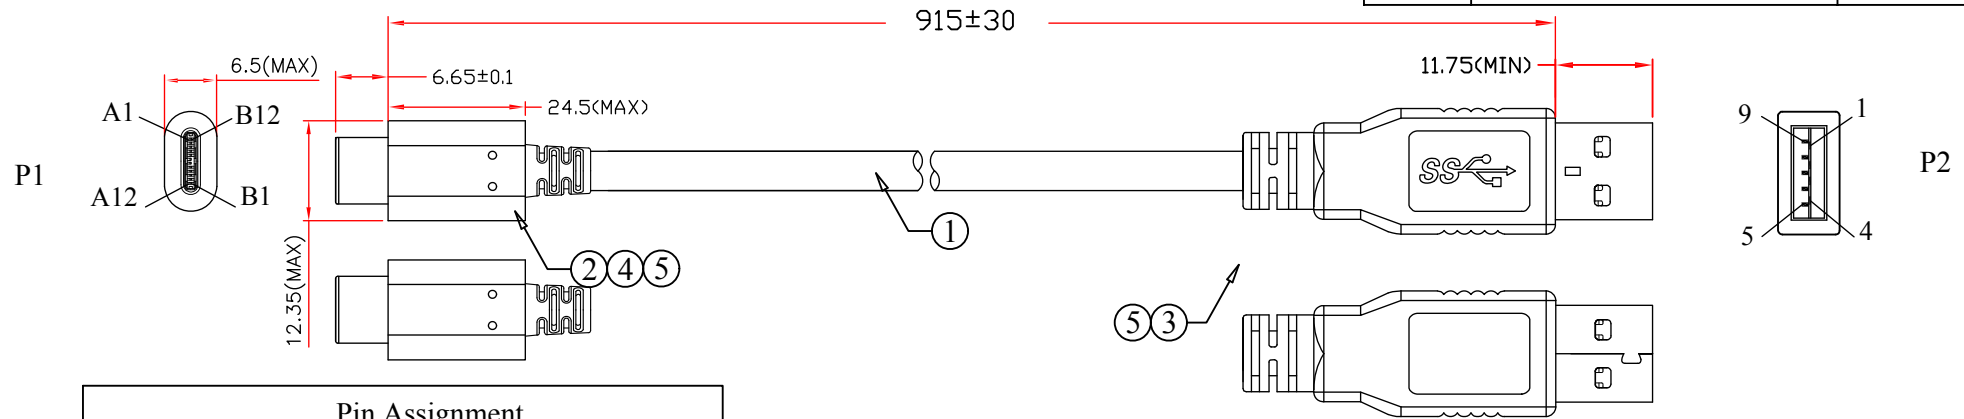




Pin Assignment	
P1	P2
A1, B1, A12, B12 (10nF 0420)	4
A4, B4, A9, B9 (56K Ω ± 5%) 0420	7
A5	1
A6	3
A7	2
A2	6
A3	5
B11	9
B10	8
SHELL	SHELL

NOTES:

1. Electrical Test:

- (1) 100% Open Short & Miswire Test.
- (2) Insulation Resistance: DC 300V ≥ 5MΩ
- (3) Conductor Resistance: ≤ 2 Ω

RoHS

5	Molded Black PVC Hood	ITEM NUMBER	10U3-32003		DRAWER	JL
4	PE Natural	TITLE	USB3.0 Type A Male to Type C Male, 10Gb, 3 ft		CHECKED	
3	USB3.0 A Type Male ,Blue Insulation, Solder Type	MATERIAL		SCALE	APPROVED	
2	USB3.1 C Type Male ,Black Insulation, Solder Type, (56K Ω ± 5%)0420 + (10nF 0420)(Type C 3.0)	REV.	A	UNIT	MM	
1	USB3.1 Cable, UL2725 (1P*30#+D+AL+Mylar)*2+1P*32#+2C*24#+AL+B, OD: 4.2mm, Black Outer PVC Jacket	DRAWING NO:				
NO	SPECIFICATIONS	ID(NO.)	44			
	BOM LIST					