



Rev.	Description	Date
A		10-2022

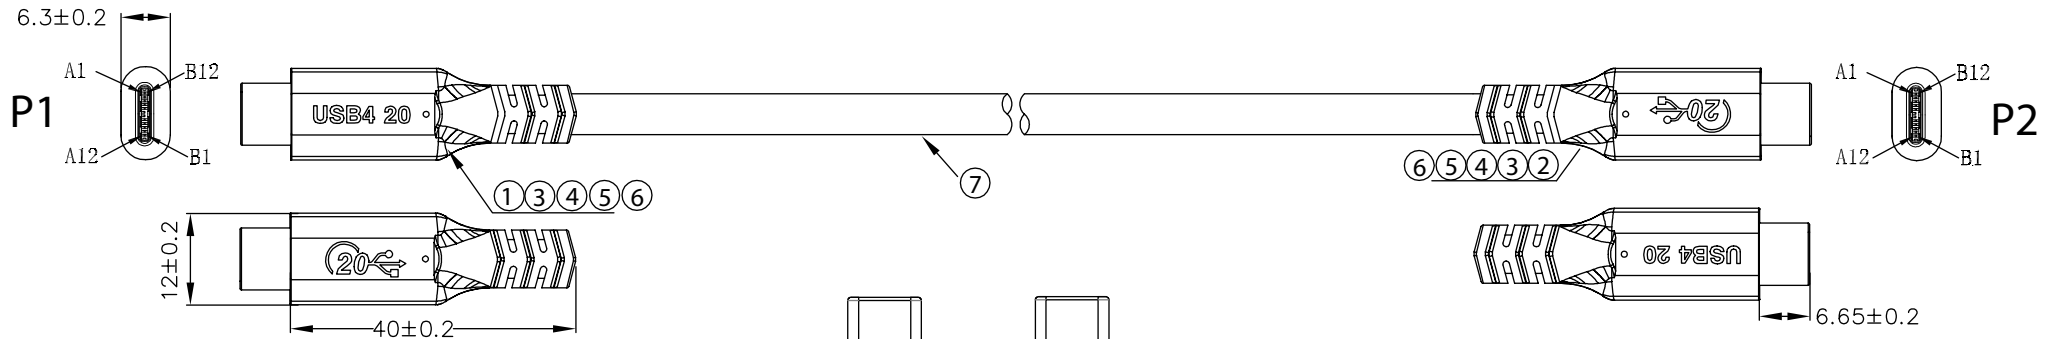

PIN Assignment	
P1	P2
VBUS	VBUS
A5	A5
B5	B5
A8	B8
B8	A8
A6	A6
A7	A7
A2	B11
A3	B10
G	G
B11	A2
B10	A3
G	G
B2	A11
B3	A10
G	G
A11	B2
A10	B3
G	G
GND	GND




RoHS

ELECTRICAL TEST:

1. 100% OPEN SHORT MIS WIRE TEST
2. CONTACT RESISTANCE: 3 OHM MAX
3. INSULATION RESISTANCE: 5M OHM MIN
4. HI-POT TEST: DC 300V/10ms
5. PASS 20Gbps 100W(20V5A) 4K@60HZ TEST (6FT)
6. PASS 20Gbps 60W(20V3A) 4K@60HZ TEST (10FT)

PART NO.	CABLE LENGHT
10U4-32006	6 FT
10U4-32010	10 FT

7	Outer molding Black PVC 60P
6	Inner molding PE Nature color
5	Copper Foil Size: 6mm
4	TYPE CM Tinplate
3	USB3.1 TYPE CM Nickel plated
2	USB3.1 TYPE CM Nickel plated + E-MARK
1	[(1/0.20BC)*1P+D(1/0.20BC)+AM+HM]*4+(1/0.20BC)*1P+(1/0.20BC)*4C +(7/0.20BC)*2C+D(7/0.20BC)+AL+B(16/5/0.08TC) OD: 5.0mm, Black Outer PVC Jacket
No.	Specifications

Item Number:	10U4-320xx	
Title:	USB-C Cable, USB 4 Type C Male to Type C Male - 20G	
Drawn by:	JL	
Approved by:	MAC	
ID:	223	