



REV.	DESCRIPTION	DATE
A		
B		01-2010
C	Updated description	06-2019

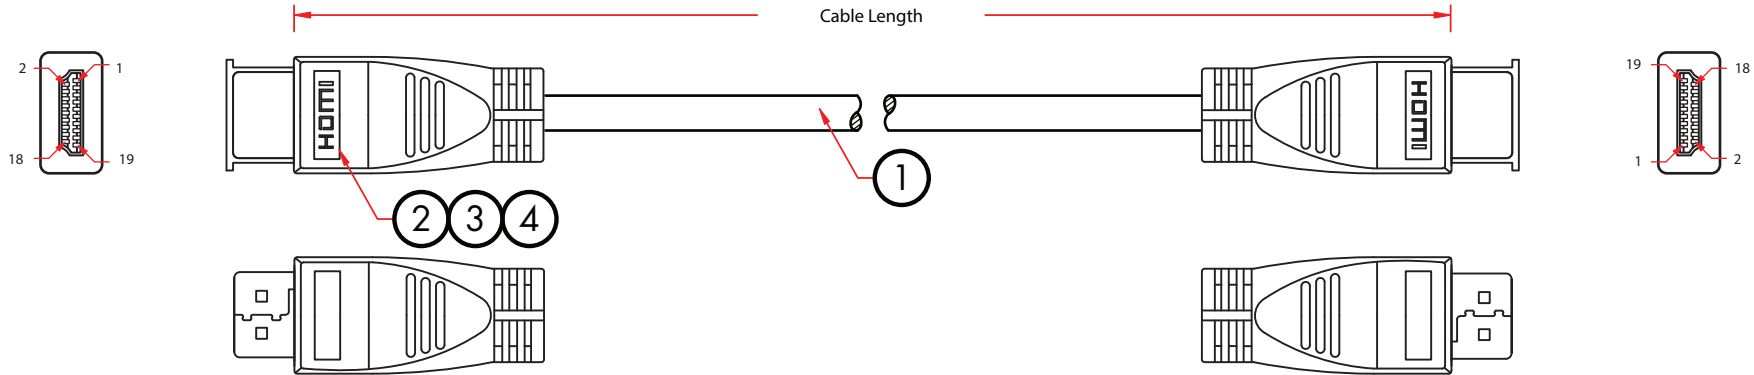

Cable Specifications:

24AWG 7/0.20mm Stranded Tinned Copper
 0.025mm AL-Mylar Foil Shield
 Tinned Copper Braid 24/10/0.12mm, 85% Coverage
 1.6mm Foam PE(1P*4) and 1.0mm HD-PE(1P+2C) Insulation
 10.0 mm OD PVC Jacket

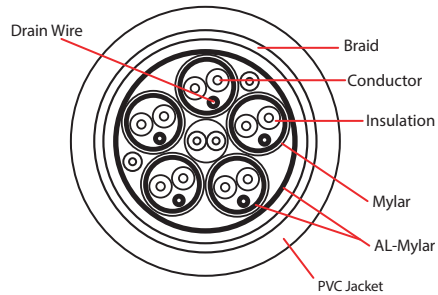

Pin Assignment

HDMI Male		HDMI Male		HDMI Male		HDMI Male	
1	White	1	White	10	Drain	10	Drain
2	Drain	2	Red	11	Green	11	Green
3	Red	3	White	12	Yellow	12	Yellow
4	White	4	Drain	13	White	13	White
5	Drain	5	Brown	14	Drain	14	Drain
6	Brown	6	White	17	Black	17	Black
7	White	7	Drain	19	Red	19	Red
8	Drain	8	Blue	15	Green	15	Green
9	Blue	9	Shell	16	Purple	16	Purple
				18	Braid	18	Braid
				Shell		Shell	

RoHS

PART NO.	CABLE LENGTH
10V3-41125	25 ft
10V3-41135	35 ft
10V3-41150	50 ft

5	
4	45P PVC, Color: Black
3	Inner Molding, Color: Clear
2	HDMI 19/M 30U, Insulation: Black, Solder Type, HDMI Shell: Gold Plated, 15u
1	CL2 Inwall Rated, UL20276 [(24AWG*1P + Drain) w/Al-Foil] *5 +24AWG*1P +24AWG*2C, w/Al-Foil + Braid, OD: 10.0mm, Black PVC Jacket
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	10V3-411xx	DRAWER	LIBRA
TITLE	HDMI Cable, High Speed w/ Ethernet 10.2Gbps / 4k@30Hz, Supports v1.4b Devices, Black, CL2-rated	CHECKED	
MATERIAL		APPROVED	
REV.	A	SCALE	UNIT
DRAWING NO:		INCH	

