


Rev.	Description	Date
A		04-2021

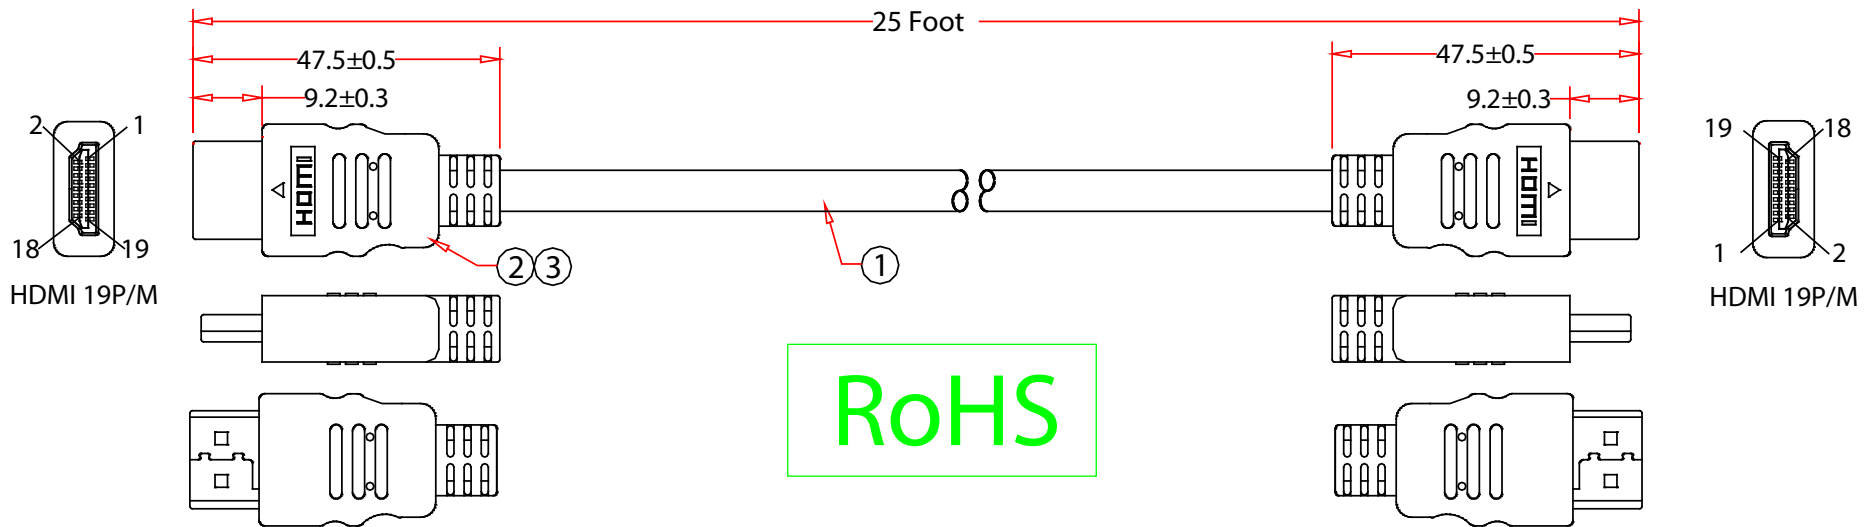

Pin Assignment


P1	P2	P1	P2
1	1 Red	14	14 Red
3	3 White	19	19 White
2	2 Shield	17	17 Shield
4	4 Red	13	13 Red
6	6 White	15	15 Orange
5	5 Shield	16	16 White
7	7 Red	18	18 Yellow
9	9 White	Shell	Shell
8	8 Shield	Braid	Braid
10	10 Red		
12	12 White		
11	11 Shield		

Marking: Exxxxxx (UL) CL2 75°C ----- AWM 20276 80°C 30V VW-1 CSA xxxxxxx
 AWM I/II A 80°C 30V FT4 MSL High Speed HDMI™ Cable with Ethernet

Remark:

- 100% Test (Open ,Short, Miss Wire)
- Contact Resistance: 6 ohms Max.
- Insulation Resistance: 10M ohm Min.
- Hi-Pot:DC 300V/10ms

3	Molded PVC Black
2	HDMI 19Pin Male, Gold Flash on Contacts & Gold Plating, Insulation Black (Tinplate)
1	HDMI 1.4v UL20276 [(28AWG*1 Pair+AL+D+MY)*5 Pcs+(28AWG*4C)]+AL +Drain+AMA Braid Shield(45%), OD:7.3mm, Black PVC Jacket
No.	Specifications

Item Number:	10V3-41125-28	
Title:	HDMI Cable, High Speed with Ethernet, HDMI-A male to HDMI-A male, 4K @ 30Hz, 28 AWG, 25 foot	
Drawn by:	JL	
Approved by:	MAC	
ID:	1	