



REV.	DESCRIPTION	DATE
A		
B		01-2010
E	Updated title and added 1.5ft length	06-2019

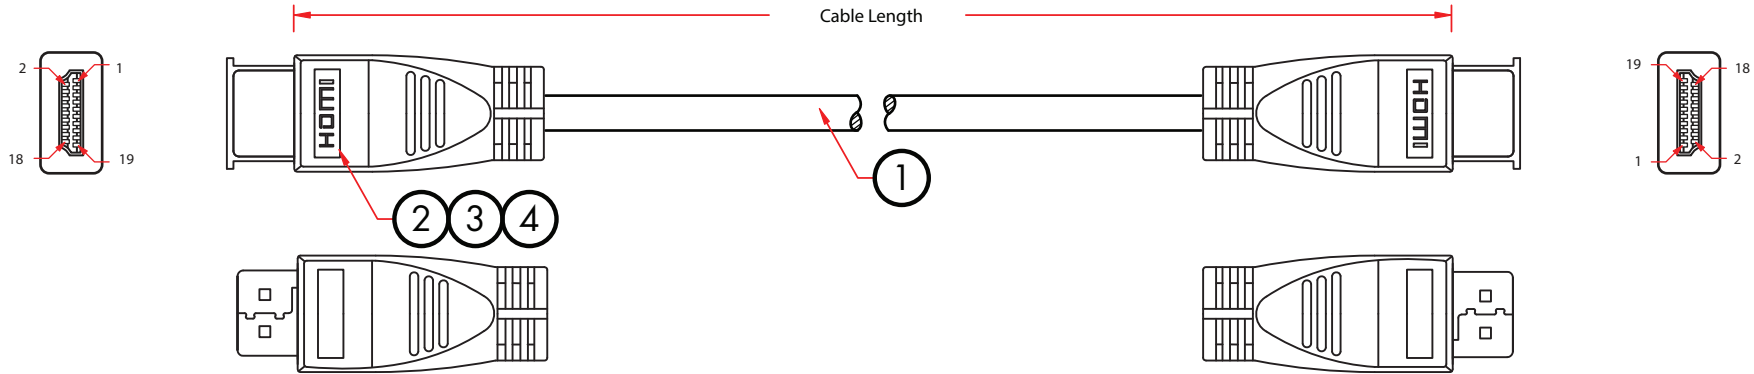

Cable Specifications:

28AWG 7/0.127mm Stranded Tinned Copper Conductor
 0.025mm AL-Mylar Foil Shield
 Tinned Copper Braid 16/10/0.12mm, 85% Coverage
 1.0mm Foam PE(1P*5) and 0.75mm HD-PE(1P+2C) Insulation
 7.3 mm OD PVC Jacket

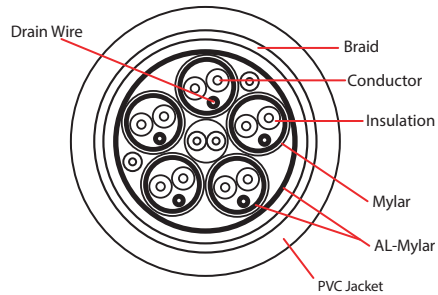

Pin Assignment

HDMI Male		HDMI Male		HDMI Male		HDMI Male	
1	White	1	White	10	White	10	White
2	Drain	2	Drain	11	Drain	11	Drain
3	Red	3	Red	12	Green	12	Green
4	White	4	White	13	Yellow	13	Yellow
5	Drain	5	Drain	14	White	14	White
6	Brown	6	Brown	17	Drain	17	Drain
7	White	7	White	19	Black	19	Black
8	Drain	8	Drain	15	Red	15	Red
9	Blue	9	Blue	16	Green	16	Green
				18	Purple	18	Purple
				Shell	Braid	Shell	Braid



PART NO.	LENGTH
10V3-41101.5	1.5 ft
10V3-41103	3 ft
10V3-41106	6 ft
10V3-41110	10 ft
10V3-41115	15 ft

5	
4	45P PVC, Color: Black
3	Inner Molding, Color: Clear
2	HDMI 19/M 30U, Insulation: Black, Solder Type, HDMI Shell: Gold Plated, 15u
1	CL2 Inwall Rated, UL20276 [(28AWG*1P + Drain) w/Al-Foil] *5 + 28AWG*1P + 28AWG*2C, w/Al-Foil + Braid, OD: 7.3mm, Black PVC Jacket
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	10V3-411xx	DRAWER	LIBRA
TITLE	HDMI Cable, High Speed w/ Ethernet 18Gbps / 4k@60Hz, Supports v2.0 Devices, Black, CL2-rated	CHECKED	
MATERIAL		APPROVED	
REV.	A	SCALE	INCH
DRAWING NO:			

