


Rev.	Description	Date
A		09-2019

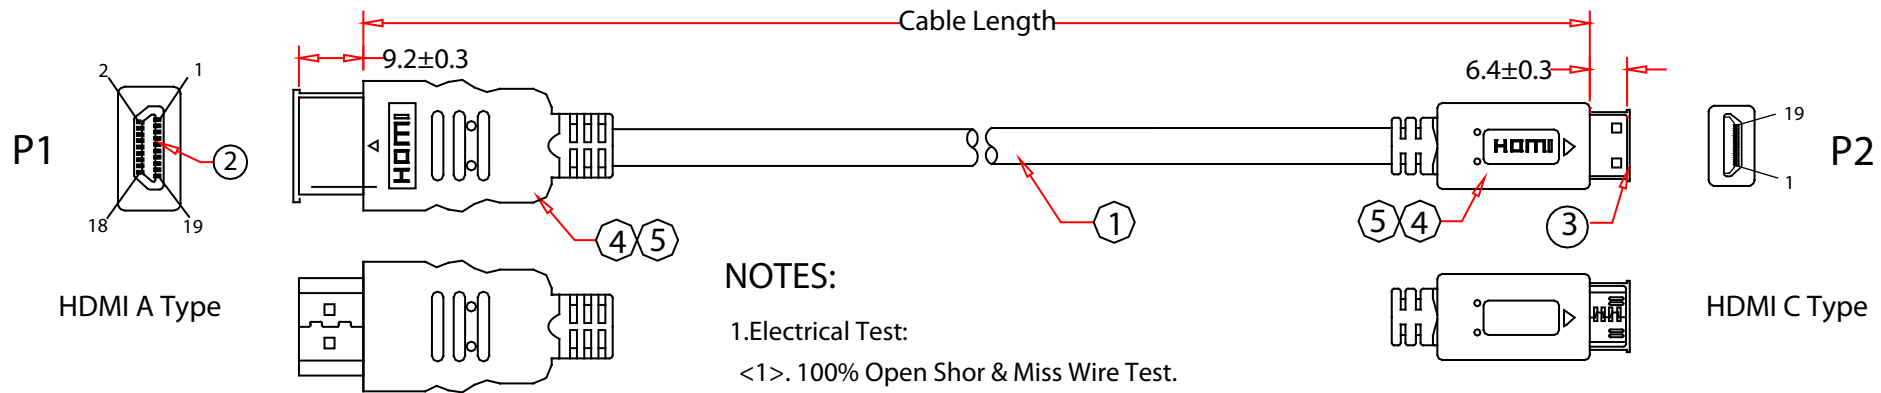

**NOTES:**

- 1.Electrical Test:  
 <1>. 100% Open Short & Miss Wire Test.  
 <2>. Conductor Resistance:5 ohm Max  
 <3>. Insulation Resistance:10M ohm Min DC 300V

RoHS

**Cable Specifications**

30AWG 7/0.10mm Stranded Tinned Copper Conductor  
 AL-Mylar Shield  
 Braid 16/4/0.12mm AL-MG  
 OD:6.0mm OD PVC Jacket  
 Foam PE(1P\*5C) and HD-PE(4C) Insulation

Pin Assignment			
P1	P2	P1	P2
1	2	10	11
3	3	12	12
2	1	11	10
4	5	14	17
6	6	19	19
5	4	17	13
7	8	13	14
9	9	15	15
8	7	16	16
		18	18
		Shell	Shell

PART NO.	CABLE LENGTH
10V3-43103	3 FT
10V3-43106	6 FT
10V3-43110	10 FT
10V3-43115	15 FT

5	Outer Molding 45P PVC, Color: Black	Item Number:	10V3-431xx
4	Inner Molding, Color: Clear	Title:	Mini HDMI Cable, High Speed with Ethernet, HDMI A Type to HDMI C Type
3	Mini HDMI 19/M, , with PCB, Gold Plated on Contacts & Shell, Black Insulator		
2	HDMI 19/M, Gold Plated on Contacts & Shell, Black Insulator	Drawn by:	JL
1	RG58 A/U Coaxia Cable, 21AWG Stranded CCS, AL/Mylar and Braid (16/3/0.12CCA) OD: 5.0mm, Black PVC Outer Jacket	Approved by:	MAC
No.	Specifications	ID:	1

