



REV.	DESCRIPTION	DATE
B		11-2014
C		05-2018

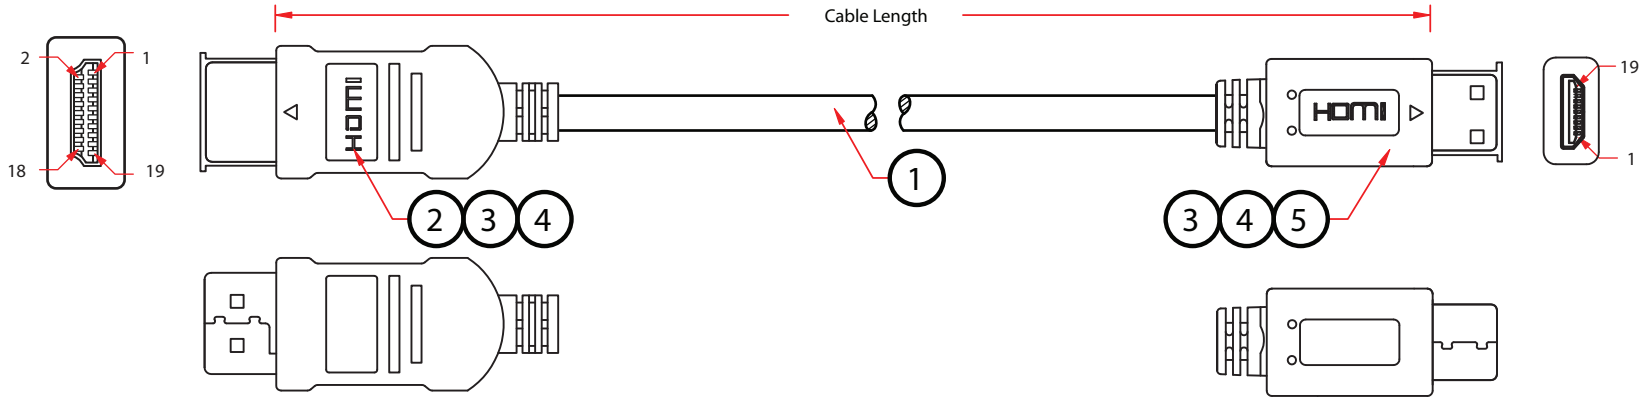

Cable Specifications:

30AWG 7/0.10mm and 28AWG 7/0.127mm Stranded Tinned Copper Conductor
 0.025mm AL-Mylar Foil Shield
 Tinned Copper Braid 16/10/0.10mm, 85% Coverage
 0.80mm Foam PE(1P*5) and 0.75mm HD-PE(4C) Insulation
 30AWG 7/0.10mm Stranded Tinned Copper Drain Wire
 6.0 mm OD PVC Jacket

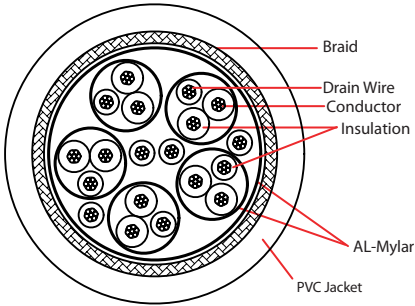

Pin Assignment

HDMI A Type Male	HDMI C Type Male	HDMI A Type Male	HDMI C Type Male
1	2	10	11
2	1	11	10
3	3	12	12
4	5	13	14
5	4	14	17
6	6	17	13
7	8	19	19
8	7	15	15
9	9	16	16
		18	18
		Shell	Shell



PART NO.	CABLE LENGTH
10V3-43103	3 ft
10V3-43106	6 ft
10V3-43110	10 ft
10V3-43115	15 ft

7	
6	
5	Mini HDMI 19/M 15u, Insulation: Black, Solder Type, HDMI Shell: Gold Plated, 5u
4	45P PVC, Color: Black
3	Inner Molding, Color: Clear
2	HDMI 19/M 15u, Insulation: Black, Solder Type, HDMI Shell: Gold Plated, 5u
1	HDMI 2.0 Compliant, UL20276 [(30AWG*1P + Drain) w/Al-Foil] *5 + 28AWG*4C, w/Al-Foil + Braid, OD: 6.0mm, Black PVC Jacket
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	10V3-431xx			DRAWER	JL
TITLE	HDMI to Mini HDMI Cable, High Speed with Ethernet TC-Braid,Black, CL2-rated, HDMI 2.0 Compliant,			CHECKED	
MATERIAL		SCALE		APPROVED	
REV.	C	UNIT	INCH		
DRAWING NO:					
ID (NO.)	223				

