


Rev.	Description	Date
A		01-2020

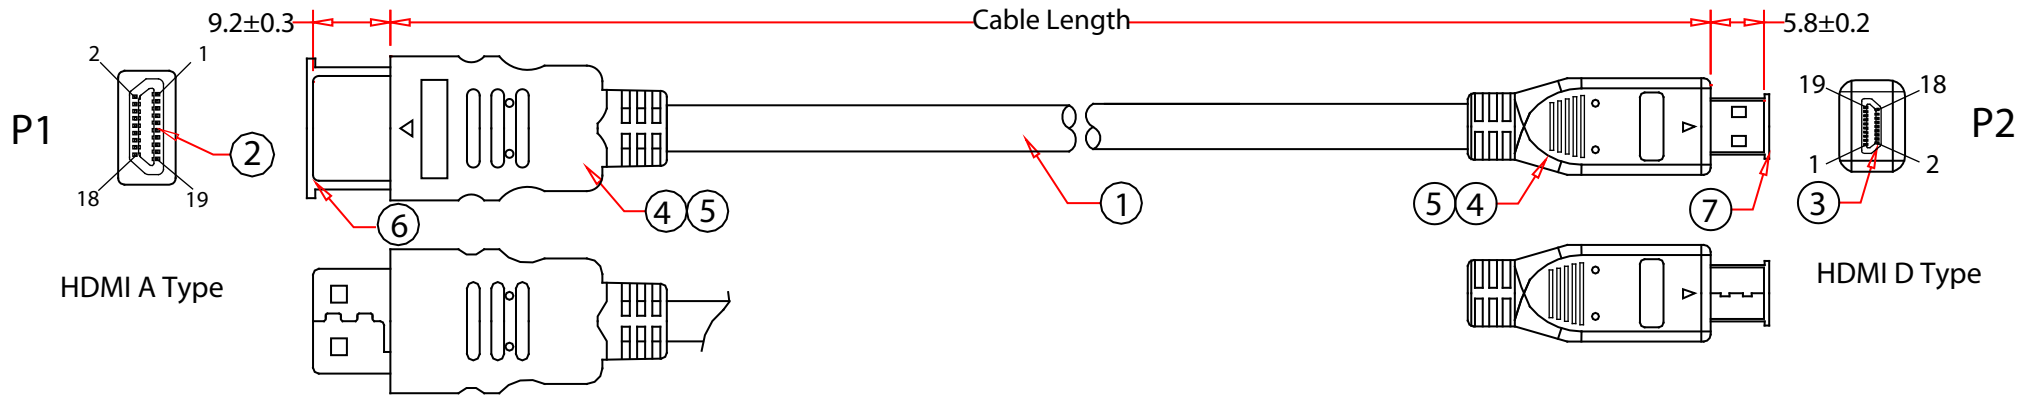

Pin Assignment			
P1	P2	P1	P2
1	3	10	12
3	5	12	14
2	4	11	13
4	6	14	2
6	8	19	1
5	7	17	16
7	9	13	15
9	11	15	17
8	10	16	18
		18	19
		Shell	Braid
			Shell


RoHS

Electrical Test:

1. 100% Open & Short & Mis Wire Test.
2. Contact Resistance: 5Ω Max.
3. Insulation Resistance: 10MΩ Min.
4. Voltage: DC 300V/ 10ms

PART NO.	CABLE LENGTH
10V3-44103	3 FT
10V3-44106	6 FT
10V3-44110	10 FT
10V3-44115	15 FT

7	HDMI D/M Cap Transparent PVC
6	HDMI A/M Cap Transparent PVC
5	Molded PVC Hood, Black Color
4	Inner Molded Nature PE
3	Micro HDMI 19Pin D Type Male, Automatic Solder, Shell Gold Plating, Insulation Black
2	HDMI 19Pin A Type Male, Automatic Solder, Shell Gold Plating, Insulation Black
1	UL20276(34AWG*1P+EAM)*5C+32AWG*1P+32AWG*2C+AB 30% Copper-Braid, OD:4.2mm,Black PVC Jacket
No.	Specifications

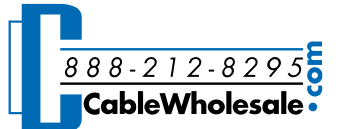Item Number:	10V3-441xx	
Title:	HDMI to Micro HDMI Cable, High Speed, with Ethernet	
Drawn by:	JL	
Approved by:	MAC	
ID:	1	