


Rev.	Description	Date
A		02-2019

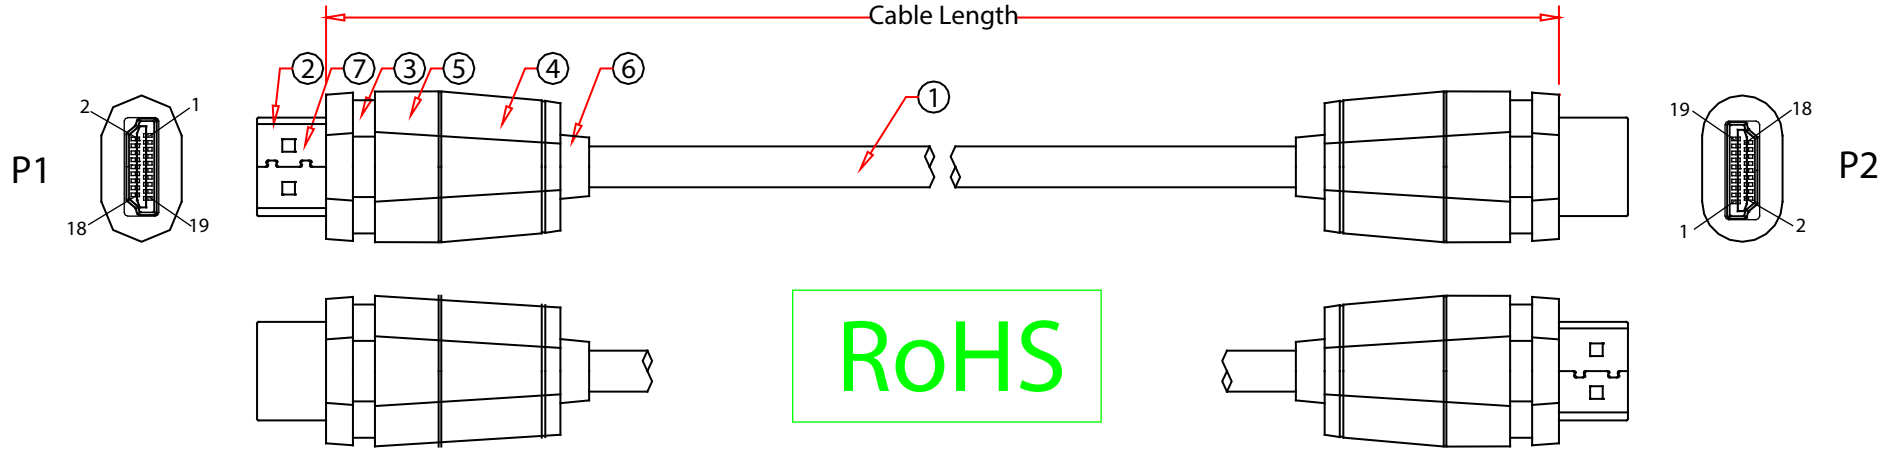


Pin Assignment			
P1	P2	P1	P2
1 White	1	10 White	10
2 Drain	2	11 Drain	11
3 Green	3	12 Blue	12
4 White	4	13 Purple	13
5 Drain	5	14 White	14
6 Orange	6	17 Drain	17
7 White	7	19 Yellow	19
8 Drain	8	15 Blue	15
9 Brown	9	16 Green	16
		18 Red	18
		Shell Braid	Shell

Signal Transmission

Supported Standards	HDMI
Transmission Modes	Digital Audio and Video Signals
Max. Bandwidth	340 MHz
Transmission Rate Max.	To 3m cable length: 18Gbps
Resolution Max.	4K (4096x2160)@60Hz
Supported Color Spaces	16/24 bit RGB/YUV, Deep Color, xvColor
Supported Audio Standards	Audio Return Channel (ARC), Dolby Digital Plus, Dolby TrueHD, DTS-HD Master Audio
More Standards	HDMI Ethernet Channel (HEC), 3D, HDCP, CEC, 4K2K (2160i/p) Full HD (1080i/p)

PART NO.	CABLE LENGTH
10V3-45101.5	1.5 FT
10V3-45103	3 FT
10V3-45106	6 FT
10V3-45110	10 FT

7	Lock Material Steel	Item Number:	10V3-451xx
6	SR: Molded PVC Black	Title:	Locking HDMI Cable, High Speed with Ethernet, HDMI Male, 4K
5	Black ABS Middle Case	Drawn by:	JL
4	Red ABS Back Case w/Sprayed Black (UV Coated)	Approved by:	MAC
3	Green ABS Front Case w/Sprayed Black (UV Coated)	ID:	53
2	HDMI A Male 19Pin Connector, 15u" Gold Plated Contacts, 1u" Gold Plated Shell		
1	HDMI Cable, AWG 30 OFC 5P +AWG30 OFC*1P+AWG30*5C Cu+Braid, Black PVC, OD5.7mm		
No.	Specifications		