Rev.	Description	Date
A		11-2020

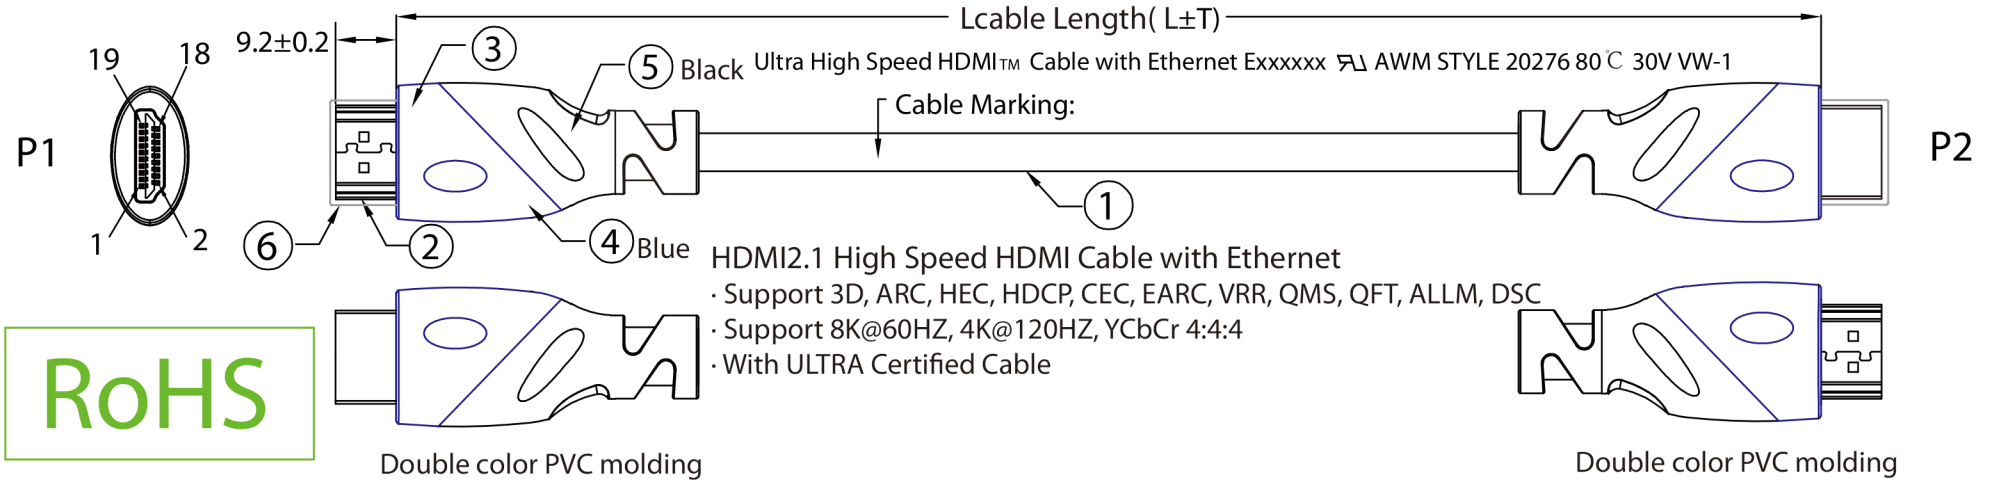

RoHS

Cable Specifications

30AWG 1/0.254mm Stranded Bare Copper Conductor
AL-Mylar Foil Shield
Braid 16/9/0.12mm AM
0.70mm FM-PE+SKIN (5P) and 0.55mm HD-PE(4C) Insulation
6.30 mm OD PVC Jacket

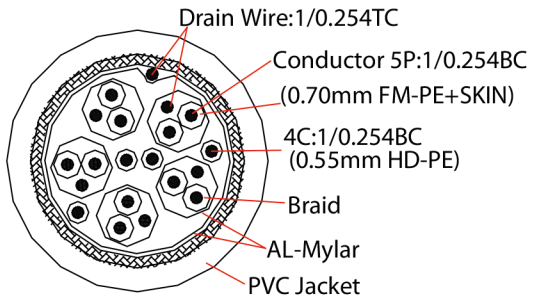

Pin Assignment

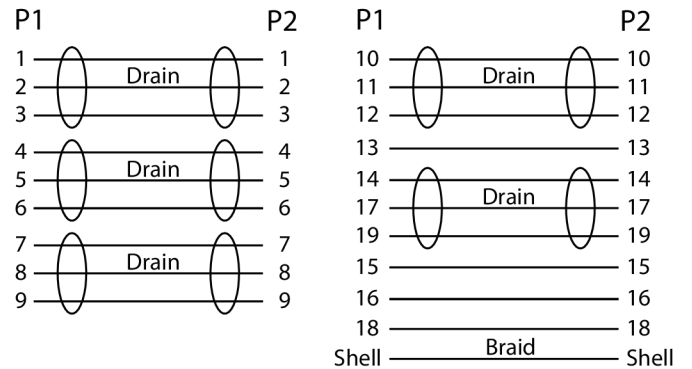

NOTES:

1.Electrical Test:
<1>. 100% Open Shor & Miss Wire Test.
<2>. Conductor Resistance:3 ohm Max
<3>. Insulation Resistance:5M ohm Min
<4>.Hi-Pot:DC 300V/10ms
<5>.Pass 8K@60Hz/ Test

PART NO.	CABLE LENGTH	
	L	±T(mm)
10V4-41103	1 meter (3.3ft)	30
10V4-41106	2 meter (6.6ft)	30

No.	Specifications
6	Dust Cover
5	Molding PVC Hood, Black Color
4	Molding PVC Hood, Blue Color
3	Inner Molding Nature PE
2	HDMI 19Pin Male, Pin: G/F, Shell Gold Plated Three-Pieces
1	30AWG[(1/0.254BC)*1P+D(1/0.254TC)+AL-Foil+ADHESIVE-PET]*5+(1/0.254BC)*4C +AL-Foil+D(1/0.254TC)+B16/9/0.12AM ,OD:6.3±0.15mm, Black PVC Jacket

Item Number:	10V4-411xx
Title:	Ultra High-Speed HDMI Cable, 4K120 / 8K60 / 10K, 48 Gbps, HDMI-A Male to HDMI-A Male, Double color PVC
Drawn by:	JL
Approved by:	MAC
ID:	223

888-212-8295 .com CableWholesale