


Rev.	Description	Date
A		12-2022

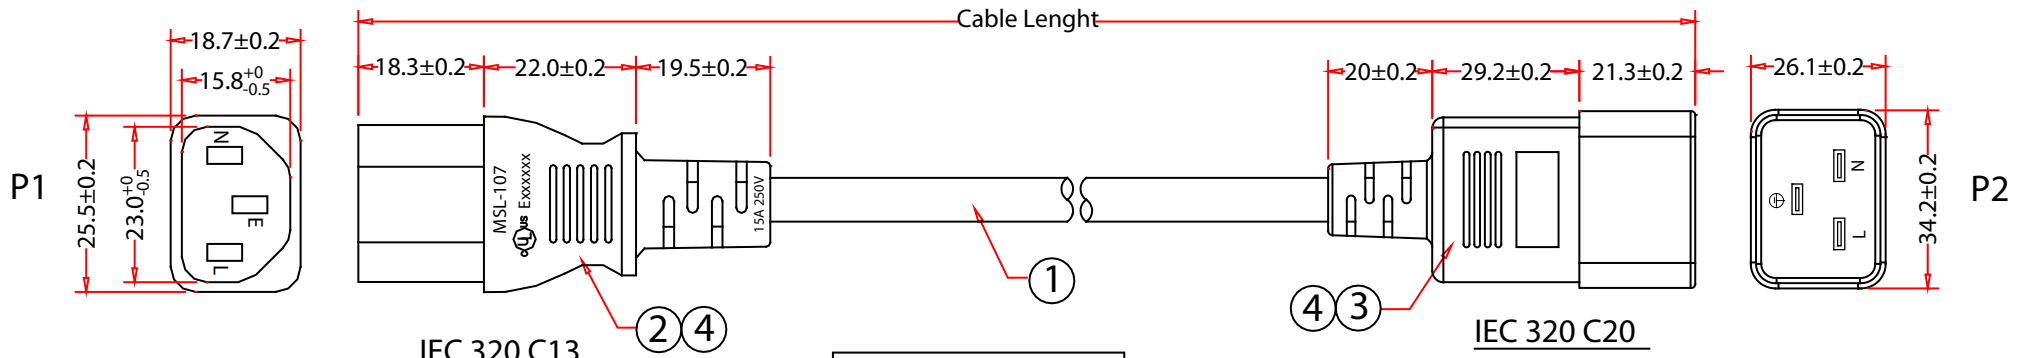



RoHS

Jacket & Molded & Bracket Color
RD Red(PT201C)
GR Green(PT376C)
BL Blue(PT286C)

Pin Assignment	
P1	P2
L — Black — L	
N — White — N	
E — Green — E	

Packing A: <2FT

Packing B: >2FT




PART NO.	CABLE LENGTH	
	L	±T
10W2-042xxXX	3 FT	±20mm
10W2-042xxXX	4 FT	±25mm
10W2-042xxXX	6 FT	±30mm

MARKING:

(UL) SJT 3/C 14AWG(2.08MM²) VW-1 105 °C 300V Exxxxxx
 CSA SJT 3/C 2.08MM²(14AWG) FT2 105 °C 300V Exxxxxx MSL

No.	Specifications
4	Molded PVC Hood
3	UL/CSA Approved IEC-320-C20, 15 Amp
2	UL/CSA Approved IEC-320-C13, 15 Amp
1	UL Approved SJT 14AWG(2.08MM ²)*3C 105°C/300V, OD:9.3±0.3mm

Item Number:	10W2-042xxXX	
Title:	Server Power Extension Cord, C20 to C13, 14AWG/3C, 15 Amp	
Drawn by:	JL	
Approved by:	MAC	
ID:	1	